





**CIRCUIT DIAGRAM (NORMAL MAGNETIC FIELD)**

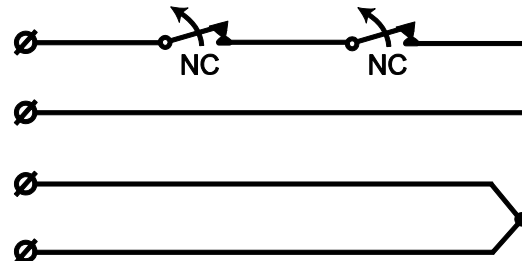

**DISTANCE DIAGRAM – WOOD**

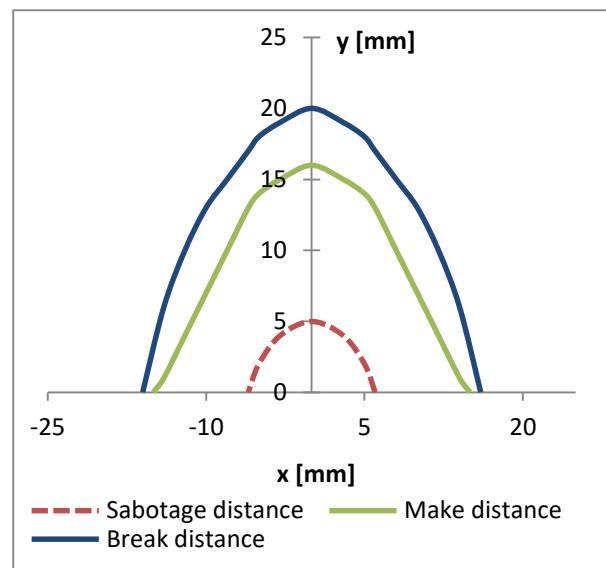

**DESCRIPTION**

MC 370 is a versatile high security magnetic contact used in both alarm and security access control systems for protection of doors, gates and windows against unauthorized opening and external magnetic field. A range of accessories makes the contact suitable for a variety of applications.

**MOUNTING INSTRUCTIONS**

- Contact and magnet should be installed axially, corresponding to each other.
- Catch-bolts on the housing enable direct installation in  $\phi$  8 mm holes in wood.

**TECHNICAL DATA**

Working environment	Wood	Steel
Sabotage distance	max. 5 mm $\pm$ 40%	Use accessories
Make distance	typ. 16 mm $\pm$ 40%	Use accessories
Break distance	typ. 20 mm	Use accessories
Contact type	form A (SPST)	
Switching voltage max.	48 V DC/AC	
Switching current max.	500 mA DC/peak AC	
Contact rating max.	10 W	
Life expectancy	>20 million switching operations at 10 V/4 mA	
Cable	$\phi$ 3,4 mm, 4x0,182 mm <sup>2</sup>	
Environmental class (EN50130-5:2011)	IIIA	
Operating temperature range	-40°C to +70°C	
Operating humidity range	max. 95% r. h.	
IP rating	IP 97	
Housing material	plastic ABS	
Dimensions:		
Contact part	$\phi$ 9 x 36 mm	
Magnet part	$\phi$ 9 x 14 mm	
Security grade (EN50131-2-6:2008)	3	
Approvals	VdS G197064 Class C, EN-ST-000092, SBSC 9-207, F&P 10.212-12856, FG MKT-1012/09, INCERT B-582-1003	

## OPERATING PRINCIPLE

MC 370 magnetic contact has two parts: the contact part with alarm and sabotage reed switches and the magnet part. In its neutral position the alarm reed switch remains closed under the force of the magnetic field. Opening the monitored object increases the distance between the reed switch and the magnet. This reduces the influence of the magnetic field on the reed switch until it opens and activates an alarm.

MC 370 has an extra sabotage reed switch to protect the contact from sabotage with an external magnet. When an external magnet is applied to the contact, the sabotage reed switch opens and activates an alarm. The sabotage switch can be also opened by the corresponding (friendly) magnet. The distance between the contact and the corresponding magnet, at which the sabotage reed switch opens is called sabotage distance.

**Magnetic contacts should not be installed in the vicinity of strong magnetic fields.**

## INSTALLATION

Contact and magnet must be aligned axially in the frames and leaves of the monitored objects (windows, doors etc.). Offset will reduce the working distances and may result in faulty operation or lower security. The contact should be mounted in the stationary part of the monitored object (ex. door frame) and the magnet in the movable part (ex. door leaf). Before mounting, holes must be drilled. Catch-bolts on the housing enable direct installation in  $\phi$  8 mm holes in wood.

For sites where it is impossible to mount the contact directly, a range of accessories is available.

Only non-ferromagnetic screws may be used when mounting the contact using accessories.

**For the most adequate distance for mounting, magnetic part should be placed close to the contact part to get Sabotage distance, then move away magnetic part to get minimum Make distance.**

After the installation, use an ohmmeter to check the electrical connections and test the function of the magnetic contact.

**Warning: applying excessive force to the housing of the contact may damage the glass body of the reed switches inside.**

## RESISTORS (OPTIONAL)

MC 370 is available in two additional options with resistors of the chosen value: MC 370-R with one resistor parallel to the alarm switch and MC 370-2R with two resistors in 2EOL configuration.

## DISTANCE TABLE

Contact	Accessory	Distance on wood [mm]		
		Sabotage	Make	Break
MC 370	-	max 5	16	20
	MC 300-S1	max 5	16	20
	MC 300-S11	max 5	16	20
	MC 300-S21	max 5	16	20
	MC 300-S31	max 5	16	20

We reserve the right to changes without notice.