

## MC 446

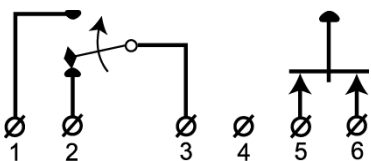
Aufbauöffnungsmelder mit  
Schraubanschlüsse, Wechsler

## Technische Daten

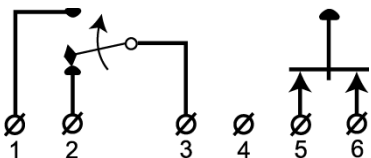
Montageart	Aufbau
Kontakttyp	Wechsler (NC/NO)
Zertifizierung	EN 50131-2-6 Grade 2, Class II, INCERT B-582-1002, SBSC 9-212, Class 2, F&P Danmark, FG
Kontaktbelastbarkeit	48 VDC / 250 mA / 5 VA
Magnettyp	Alnico 5
Montage auf Stahl	Nur mit Zubehör
Schaltabstand (Holz) mm	26
Schaltabstand (Stahl) mm	14
Manipulationsschutz	Ja
Anschlüsse	Schraubanschlüsse
Gehäuse	ABS - Kunststoff
Betriebstemperatur	-40°C - +70°C
Schutzklasse	IP 43
Abmessungen Kontakt (L x B x H) mm	65 x 20 x 15
Abmessungen Magnet (L x B x H) mm	65 x 14 x 10
Grade	2



## Beschreibung










MC 446 is a surface mount magnetic contact with change-over NC/NO function and with 6 screw connections. It can be used in both in alarm and access control systems for monitoring e.g. doors and windows against unauthorised opening. It has screw terminals with wire protection and a sabotage contact. Enclosed are plastic spacers for installation on steel. The contact can be supplemented with different accessories such as brackets and extra strong magnets.



## BESTELLUNGSMITTELMER

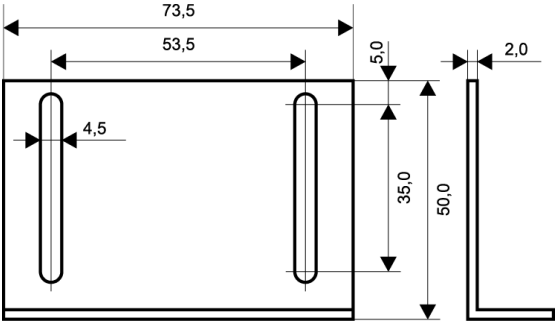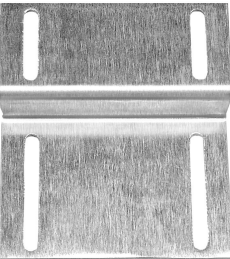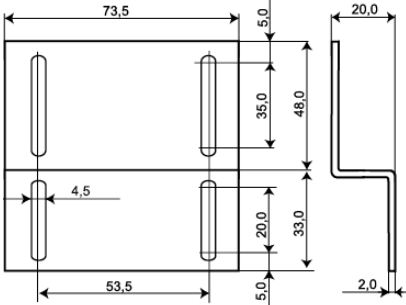Artikel	Beschreibung
MC 446	Aufbauöffnungsmelder mit Wechselkontakt, Sabotagekontakt und Schraubanschluss

## Verwandte Produkte und Zubehör

	<p><b>MC 400-3</b></p> <p>MC 400-3 Abstandshalter für MC 400 Serie</p>	
	<p><b>MC 400-4</b></p> <p>Abstandshalter für MC 400 Serie</p>	
	<p><b>MC 400-MX</b></p> <p>Starker Magnet für MC 400 serie</p>	
	<p><b>MC L Montagewinkel I</b></p> <p>Aluminium- Montagewinkel</p>	 <p>Technical drawing showing dimensions for MC L Montagewinkel I: 73,5 (total width), 53,5 (width between holes), 4,5 (hole width), 5,0 (hole depth), 35,0 (height to hole center), 50,0 (total height), and 2,0 (flange thickness).</p>
	<p><b>MC Z</b></p> <p>Installation Z- Bracket</p>	 <p>Technical drawing showing dimensions for MC Z Installation Z-Bracket: 73,5 (total width), 53,5 (width between holes), 4,5 (hole width), 5,0 (hole depth), 35,0 (height to hole center), 48,0 (total height), 33,0 (height to bottom hole center), 20,0 (flange width), and 2,0 (flange thickness).</p>