

# GD 330-S

## Glass Break Detector, Glued



### Technical data


Maximum coverage	2 m radius (standard 3 mm glass)
Approvals	EN 50131-2-7-2:2013 Grade 2, VdS class B - G192531, SBSC 10-31, Class 2
Supply voltage	8-15 VDC
Current consumption	5 mA (12 mA in alarm mode)
Alarm output	Relay, NC
Contact rating	50 VDC / 100 mA
Alarm indication	LED
Tamper protection	Yes
Alarm hold time	Latching
Alarm reset	Power down
Connection	Cable / Screw terminals
Housing material	ABS Plastic
Colour	White
Housing protection class	IP 67
Dimensions (H x Ø) mm	16 x 35
Dimensions (L x W x H) mm	91 x 31 x 23



The GD 330-S has the same features as the GD 330 with relay output and can be directly connected to a control panel via the junction box JB 103-6.

The detector has a coiled cable with modular connector that plugs into the junction box JB 103-6, which allows it to be quickly and easily disconnected from the detector loop when, for example, cleaning windows.


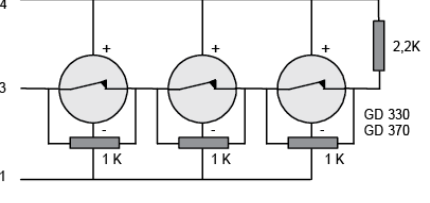
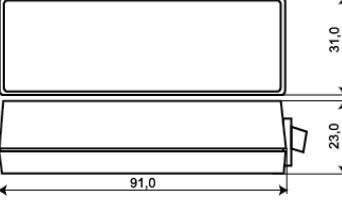


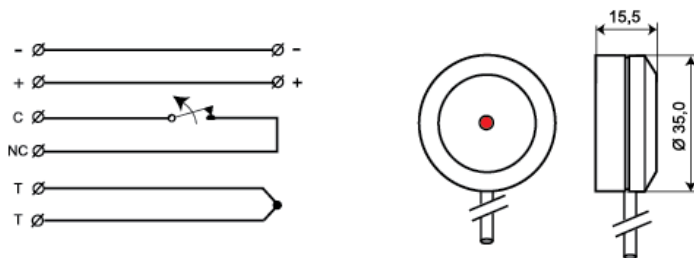

**For laminated and tempered glass please use GD 370 or GD 470.**




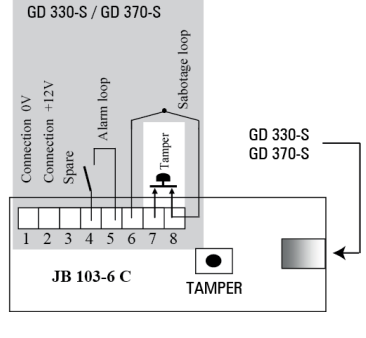
### ORDERING INFORMATION

Model	Description
GD 330-S	Glass break detector with relay output, glued, coiled cable with 6-pin modular connector plug
GD 330-SJ	Glass break detector with relay output, glued, coiled cable with 6-pin modular connector plug and junction box JB 103-6

## Related products and accessories

	<p><b>IU 370</b></p> <p>Interface unit for GD 330/ GD 370/ GD 470</p>		
	<p><b>CG 100</b></p> <p>Cable Conduit</p>		
	<p><b>GDK 100</b></p> <p>Adhesive Kit</p>		
	<p><b>GVT 500</b></p> <p><b>DISCONTINUED</b> - Replaced by <a href="#">GVT 5000</a></p> <p>Test unit for GD 300/GD 400 Glass Break Detectors.</p>		
	<p><b>GVT 5000</b></p> <p>Test Unit for Glass Break and Vibration Detectors</p>		

**Related products and accessories**

	<p><b>JB 103-6</b></p> <p>Junction box for GD 330-S or GD 370-S</p>	
---	---	--