

GD 370-S

Glass Break Detector for Laminated Glass, Glued



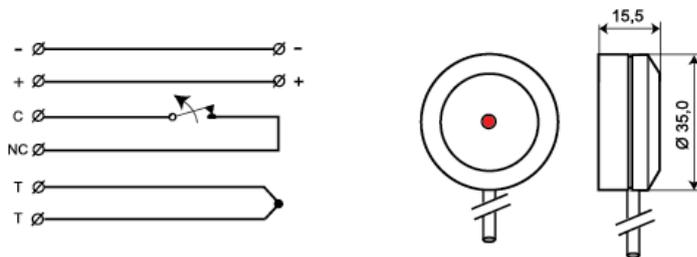
Technical data

Maximum coverage	2 m radius (standard 4-6 mm glass)
Approvals	EN 50131-2-7-2:2013 Grade 2, VdS G 110523 Class B, SBSC 10-33 Class 3
Current consumption	1,5 mA (3 mA in alarm state)
Alarm output	Relay, NC
Contact rating	50 VDC / 100 mA
Alarm indication	LED
Tamper protection	Yes
Alarm hold time	Latching
Alarm reset	Power down
Connection	Cable
Housing material	ABS Plastic
Colour	White
Housing protection class	IP 67
Dimensions (H x Ø) mm	16 x 35
Dimensions (L x W x H) mm	91 x 31 x 23



The GD 370-S has the same features as the GD 370 with relay output and can be directly connected to a control panel via the junction box JB 103-6.

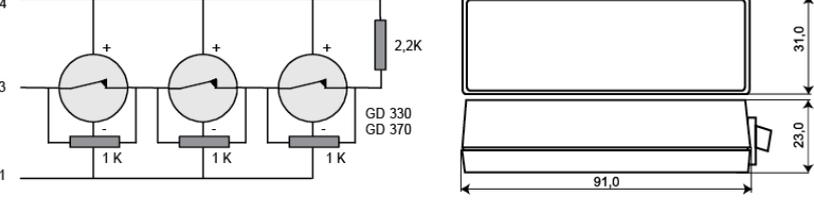
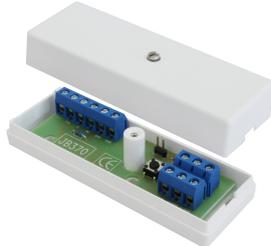
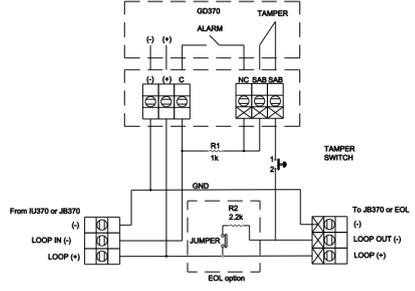
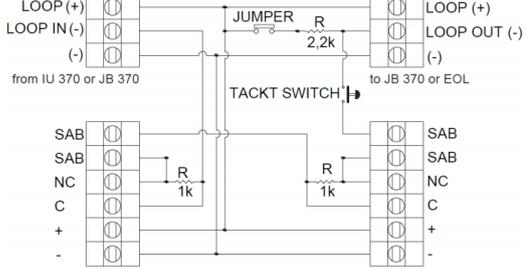
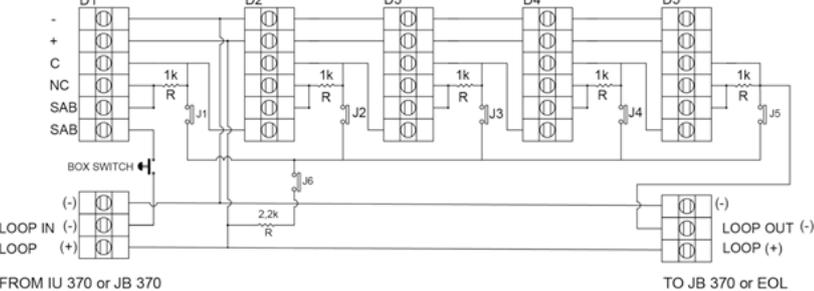
The detector has a coiled cable with a modular connector that plugs into the junction box JB 103-6, which allows it to be quickly and easily disconnected from the detector loop when, for example, cleaning windows.



ORDERING INFORMATION

Model	Description
GD 370-S	Glass break detector for laminated glass with relay output, glued, coiled cable with 6-pin modular connector plug
GD 370-SJ	Glass break detector for laminated glass with relay output, glued, coiled cable with 6-pin modular connector plug and junction box JB 103-6

Related products and accessories

	<p>IU 370</p> <p>Interface unit for GD 330/ GD 370/ GD 470</p>	
	<p>JB 370</p> <p>DISCONTINUED - Replaced by JB 370-2</p> <p>Junction Box for GD 370 and GD 470 Glass Break Detectors</p>	
	<p>JB 370-2</p> <p>Junction Box for GD 370 and GD 470 Glass Break Detectors</p>	
	<p>JB 370-5</p> <p>Junction Box for GD 370 Glass Break Detector</p>	
	<p>CG 100</p> <p>Cable Conduit</p>	

Related products and accessories

	<p>GDK 100 Adhesive Kit</p>
	<p>GVT 500 DISCONTINUED - Replaced by GVT 5000 Test unit for GD 300/GD 400 Glass Break Detectors.</p>
	<p>GVT 5000 Test Unit for Glass Break and Vibration Detectors</p>
	<p>JB 103-6 Junction box for GD 330-S or GD 370-S</p>