

GD 375-S

Glass Break Detector for Laminated Glass, Glued


Technical data

Maximum coverage	2 m radius (standard 4-6 mm glass)
Supply voltage	5-15 VDC
Current consumption	5 μ A (7 mA in alarm state)
Alarm output	Transistor output
Alarm indication	LED
Alarm hold time	Latching
Alarm reset	Power down
Connection	Cable / Screw terminals
Housing material	ABS Plastic
Colour	White
Operating temperature range	-40 - +70°C
Housing protection class	IP 67
Dimensions (H x Ø) mm	11 x 27
Dimensions (L x W x H) mm	91 x 31 x 23



The GD 375-S has the same features as the GD 375 with transistor output and can be directly connected to a control panel via the junction box JB 103-4.


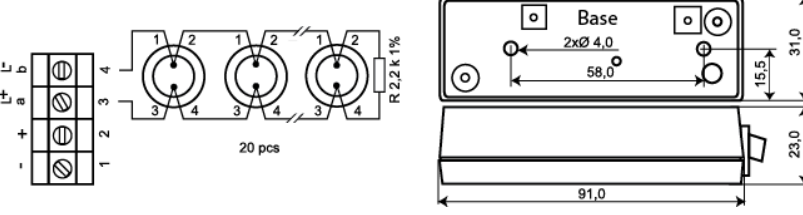


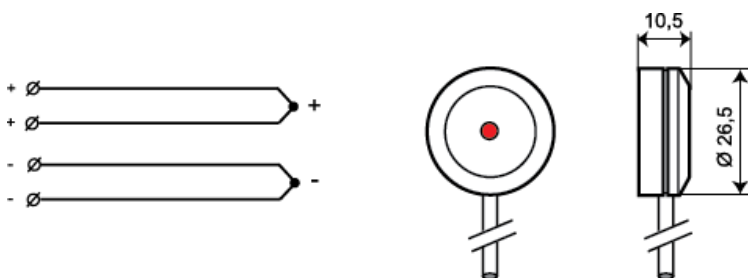

The detector has a coiled cable with a modular connector that plugs into the junction box JB 103-4, which allows it to be quickly and easily disconnected from the detector loop when, for example, cleaning windows.



ORDERING INFORMATION

Model	Description
GD 375-S	Glass break detector for laminated glass with transistor output, glued, coiled cable with 4-pin modular connector plug
GD 375-SJ	Glass break detector for laminated glass with transistor output, glued, coiled cable with 4-pin modular connector plug and junction box JB 103-4

Related products and accessories

	<p>IU 300</p> <p>Interface unit for GD 335 and GD 375</p>	
	<p>CG 100</p> <p>Cable Conduit</p>	
	<p>GDK 100</p> <p>Adhesive Kit</p>	
	<p>GVT 500</p> <p>DISCONTINUED - Replaced by GVT 5000</p> <p>Test unit for GD 300/GD 400 Glass Break Detectors.</p>	
	<p>GVT 5000</p> <p>Test Unit for Glass Break and Vibration Detectors</p>	

Related products and accessories**JB 103-4**

Junction box for
GD 335-S, GD
375-S or GD
475-S