

# HB 105-L

## EN Grade 3 approved Personal attack switch with dual latching push-buttons

EN3


### Technical data

|                             |                                 |
|-----------------------------|---------------------------------|
| Approvals                   | EN CLC/TS 50131-11:2012 Grade 3 |
| Alarm output                | 2 x NC/NO                       |
| Contact rating              | 30 VDC / 100 mA                 |
| Alarm indication            | LED                             |
| Tamper protection / Rating  | YES / 12 VDC / 50 mA            |
| Connection                  | Screw terminals                 |
| Housing material            | ABS Plastic                     |
| Colour                      | White                           |
| Operating temperature range | -10 - +55°C                     |
| Housing protection class    | IP 31                           |
| Dimensions (L x W x H) mm   | 80 x 65 x 30                    |



The HB 105-L is a mechanical personal attack button approved in EN Grade 3 that can be used for various functions within in an alarm system.

The HB 105-L has two latching push button switches with alternating (NC/ NO) function in the terminal. The buttons can be assigned either a single function or separate functions. There is also an input to control the built-in LED as well as an anti-tamper switch to protect against unauthorised opening.

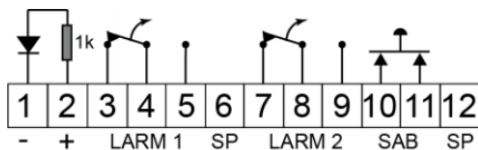

## Related products and accessories

**HB 105-M**

EN Grade 3  
approved  
Personal attack  
switch with dual  
momentary  
push-buttons

