


RC 3

Relay card 10-30 V

Technical data



Relay output	2 x NC/NO
Supply voltage	10-30 VDC
Current consumption	16 mA @12 VDC / 20 mA @30 VDC
Contact rating	30 VA, 30 V DC/AC, 1A
Connection	Screw terminals
Operating temperature range	-20 - +50°C
Dimensions (L x W x H) mm	43 x 29 x 15
Description	Relay card 10-30 V

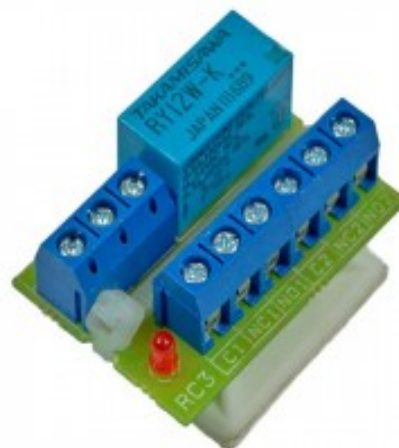

The RC 3 is a very compact and universal relay card with dual alternating (NC / NO) relay function. Connection is provided via screw terminal with wire protection.

Transistor control of the relay means a very low control signal is required (1 mA, 12V). An activated relay is indicated via a LED.

9 – 30 V DC

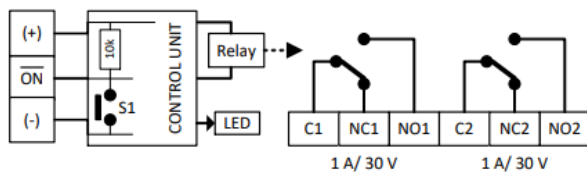

9 – 30 V DC

