

# OP 100

## Control unit, fibre optic alarm

### Technical data

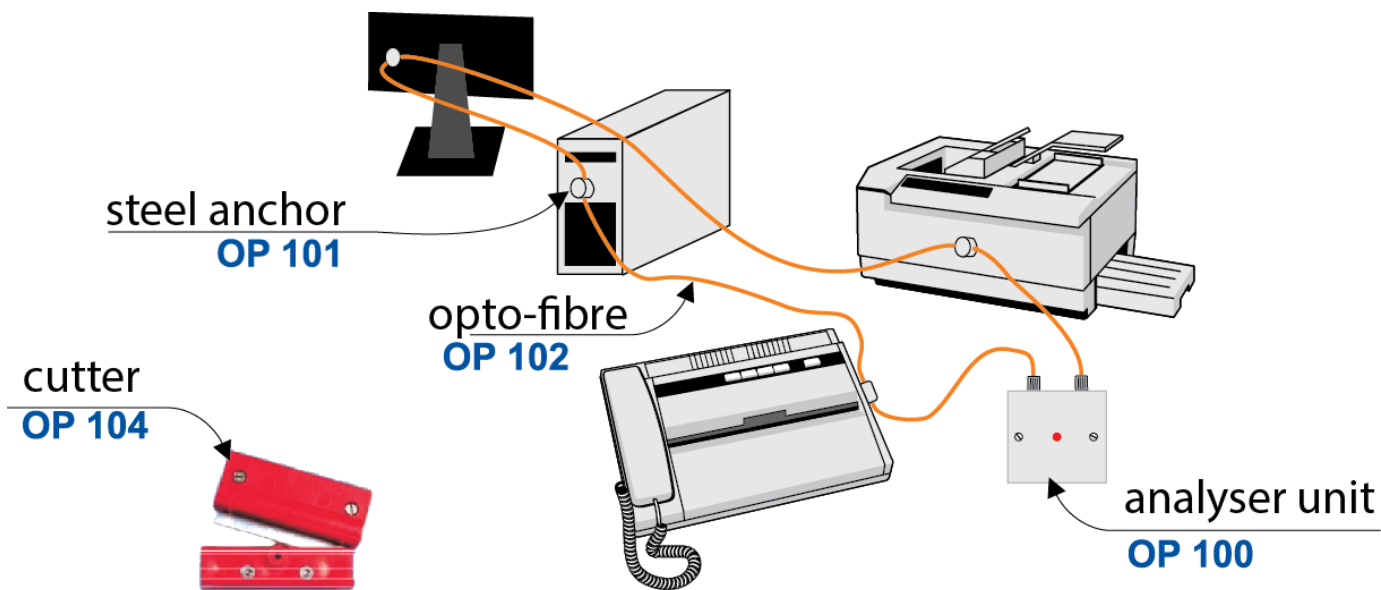
Supply voltage	8 - 15 VDC
Current draw (standby)	5 mA
Current draw (alarm)	8 mA
Contact rating	50 VDC / 100 mA
Connection	Screw terminals
Housing material	ABS Plastic
Colour	White
Operating temperature range	-10 to +70°C
Housing protection class	IP 31
Dimensions (L x W x H) mm	90 x 66 x 30








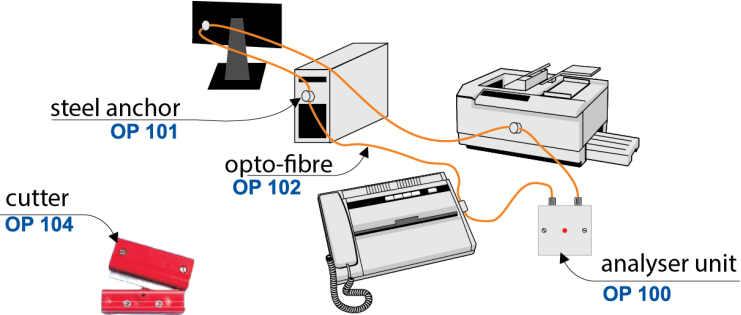
The system consists of an interface unit, which is connected to an optical fibre. The control unit sends a coded pulsed light through the fibre. The signal is received by the control unit and is compared with that sent out. Monitored devices are connected to the fibre via specially designed brackets or through existing vents or similar in the monitored device. The control unit is connected to a 24-hour loop in the control panel and any attempt to remove a device or sabotage the optical fibre will generate an alarm.

The fibre allows the monitored device to be used in a normal way and the system is completely insensitive to electronic interference. The optical fibre is soft and about 2 mm in diameter, which makes it easy to bend. Maximum length of the fibre is 40m, which allows many devices to be monitored from one control unit.

The control unit has a relay output (NC) that can be programmed to latch or auto reset mode. The relay can be reset remotely via an input in the latch function. The LED indicator can follow the relay or solely function in day-mode.



## Related products and accessories

	<p><b>OP 101</b></p> <p>Stainless steel anchor, fibre optic alarm</p>
	<p><b>OP 102</b></p> <p>Optical fibre, fibre optic alarm</p>
	<p><b>OP 103</b></p> <p>Splice sleeve, fibre optic alarm</p>
	<p><b>OP 104</b></p> <p>Fibre cutter, fibre optic alarm</p>
	 <p><b>OP 105</b></p> <p>Fibre optic alarm kit</p> <p>steel anchor OP 101</p> <p>opto-fibre OP 102</p> <p>cutter OP 104</p> <p>analyser unit OP 100</p>