


A.06

DC/DC CONVERTER 24/12 conv. 2,5 A

Technical data

Relay output	12 VDC/2,5 A, 24 VDC/3,15A
Input max. load	24 VDC
Tamper switch max. load	50 mA
Anti-tamper protection	Yes
Cable dimension - input	0,2 - 2,5 mm ²
Cable dimension - output	0,14 - 1,5 mm ²
Dimensions (L x W)	116 x 80

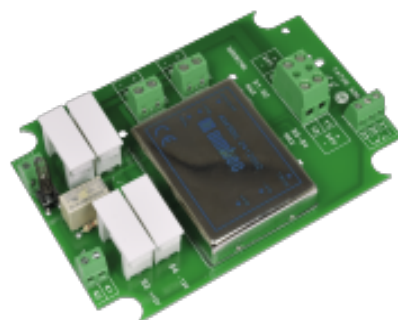

Terminal block for installation of alarm and access systems.

Anti-tampering protected DC/DC converter 24V to 12V, 2,5 A.

Inputs:

- 24 VD (01/02)

Outputs:

- 12 VDC fused (S3/S4)
- 24 VDC fused (S1/S2)
- 24 VDC not fused (11/12)


Tamper switch (31/32)

Operating indicator:

- In normal operation, outputs 22 and 23 are short-circuited
- In case of interruptions, outputs 21 and 22 are shorted.

Grounded connections: (41,42)

The terminal has screw connection with elevator function.

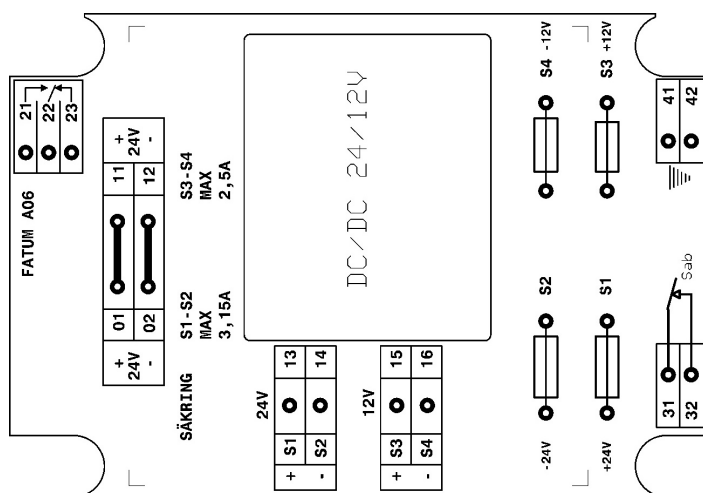

ORDERING INFORMATION

Model	Description
A.06	DC/DC Converter 24/12 V, Tamper Protected, Screw terminals