

## MC 240-S78

## Magnetic Contact Set in Al Housing




## Technical data

Installation method	Surface mount
Contact function	Normally Closed (NC)
Approvals	EN 50131-2-6 Grade 2, Class IIIA, VdS G 193513 Class B, INCERT B-582-1003, SBSC 9-196, Class 2, NF&A2P
Contact rating	48 VDC / 500 mA / 10 VA
Magnet type	Alnico 5
Make distance (wood) mm	42
Make distance (steel) mm	34
Tamper protection	Yes
Connection	Cable
Housing material	Aluminium
Operating temperature range	-40°C - +70°C
Housing protection class	IP 67
Contact dimensions (L x W x H) mm	74 x 30 x 30
Magnet dimensions (L x W x H) mm	74 x 30 x 30
Grade	2



The MC 240-S78 set is intended for exposed environments where a more durable magnetic contact is needed on steel surface or iron doors and gates, etc. The set consists of MC 240-C contact with NC contact function installed in MC 200-7 Al housing and an extra strong magnet in MC 200-8 Al housing, which allows for a wide opening gap.

MC 240-S78 set has a 1 m long stainless steel Flexi-tube protection (MC T4).

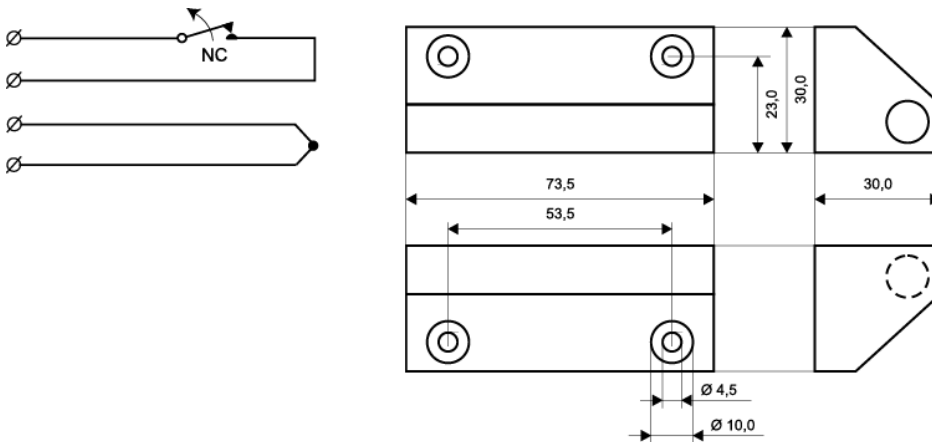

## ORDERING INFORMATION

Model	Description
MC 240-S78	Magnetic contact set, 6 m cable