


3090

## ALARM MODULE 16 POLES WITH 2x RJ 45, SHIELDED

## Technical data

Cable dimension - LSA slots (mm)	Ø 0,4 - 0,7
Cable dimension - screw terminals	0,2 - 2,5 mm <sup>2</sup>
Input max. load	50 V / 1.5 A
Tamper switch max. load	50 mA
Anti-tamper protection	Yes

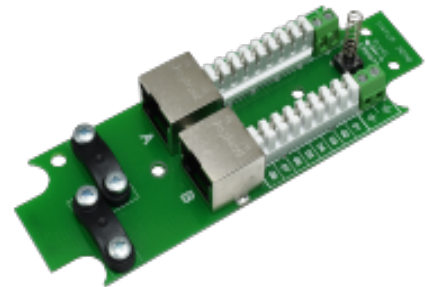

## Shielded Alarm module for installation of alarm and access systems.

Anti-tampering protected module with 2x RJ 45 connector.

Designed for alarm and access systems and can be used for sliding doors or ports.

The terminal block has 16 connections + 4 poles of which 2 are intended for anti-tamper switch connection and and 2 is free.

The terminal module has screw connection with elevator function.

