

HB 205-BL

Personal Attack Button, single momentary push-button


Technical data

Alarm output	NC/NO
Contact rating	30 VDC / 100 mA
Alarm indication	LED
Tamper protection	NC, 12 VDC / 50 mA
Connection	Screw terminals
Housing material	ABS Plastic
Colour	Black
Operating temperature range	-10 to +55°C
Housing protection class	IP 31
Dimensions (L x W x H) mm	62 x 50 x 35


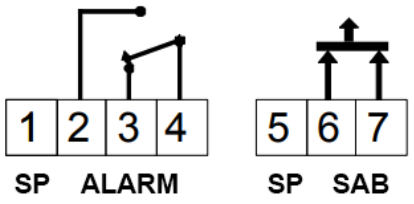

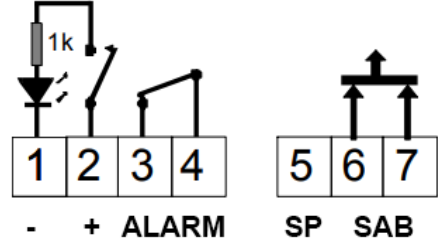


The HB 205 is a personal attack button with momentary NC/NO function.

It has an anti-tamper switch to protect against unauthorised opening.

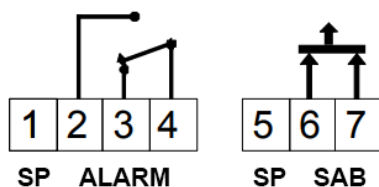

Related products and accessories

	<p>HB 205</p> <p>Personal Attack Button, single momentary push-button</p>	 <p>The diagram shows two terminal blocks. The first block has terminals 1, 2, 3, and 4. Terminal 1 is labeled 'SP' and terminal 2 is labeled 'ALARM'. A wire connects terminal 2 to terminal 3, and another wire connects terminal 3 to terminal 4. The second block has terminals 5, 6, and 7. Terminal 5 is labeled 'SP' and terminal 6 is labeled 'SAB'. A wire connects terminal 6 to terminal 7, and another wire connects terminal 7 to terminal 5.</p>
	<p>HB 205-L</p> <p>Personal Attack Button, single momentary push-button</p>	 <p>The diagram shows two terminal blocks. The first block has terminals 1, 2, 3, and 4. Terminal 1 is labeled '-' and terminal 2 is labeled '+ ALARM'. A 1k resistor is connected between terminal 1 and terminal 2. A wire connects terminal 2 to terminal 3, and another wire connects terminal 3 to terminal 4. The second block has terminals 5, 6, and 7. Terminal 5 is labeled 'SP' and terminal 6 is labeled 'SAB'. A wire connects terminal 6 to terminal 7, and another wire connects terminal 7 to terminal 5.</p>