

## MC 270-S48

## Magnetic Contact Set in Al Housing



## Technical data

Installation method	Surface mount
Contact function	Normally Closed (NC)
Approvals	EN 50131-2-6 Grade 3, Class IIIA, VdS G 116028 Class C, INCERT B-582-1003, SBSC 9-205, Class 3, F&P, NBÚ CZ Typ 3, NBÚ SK Typ 3
Contact rating	48 VDC / 500 mA / 10 VA
Mounting on steel	Only with accessories
Make distance (wood) mm	33
Sabotage distance (wood) mm	20
Make distance (steel) mm	27 (with bracket MC L or MC Z)
Sabotage distance (steel) mm	15 (with MC-L or MC-Z bracket)
Tamper protection	Yes
Connection	Cable
Housing material	Aluminium
Operating temperature range	-40°C – +70°C
Housing protection class	IP 67
Contact dimensions (L x W x H) mm	74 x 25 x 15
Magnet dimensions (L x W x H) mm	74 x 30 x 30
Grade	3




The MC 270-S48 set is intended for use in exposed environments where a more durable high security contact is needed, such as garage doors, industrial gates, etc.

The set consists of MC 270-C contact part with NC contact function installed in MC 200-4 Al housing and an extra strong magnet in MC 200-8 Al housing, which allows for a wide opening gap. MC 270-S48 set contains a 1 m long stainless steel Flexi-tube protection (MC T4). Contact and magnet are paired. To ensure proper functionality, do not replace the contact or magnet alone.

With appropriate accessories, the contact can even be installed in steel doors, safety valves, garage doors, etc.

The contact part is sealed with special epoxy, making it water resistant.

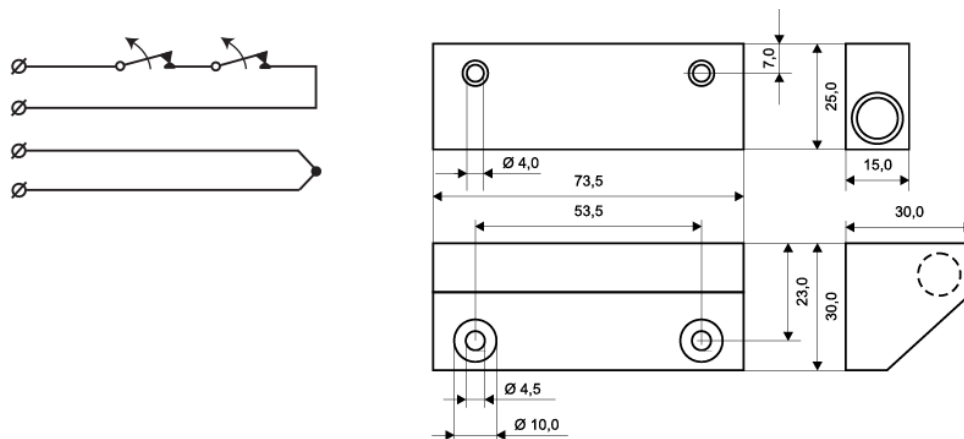

## ORDERING INFORMATION

Model	Description
MC 270	High security contact set, NC, 6 m cable