

GD 475-S

DISCONTINUED - Replaced by GD 475-SJ

Glass Break Detector for Laminated Glass, Glued,
Transistor output

Polarity independent



Technical data





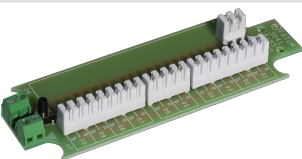
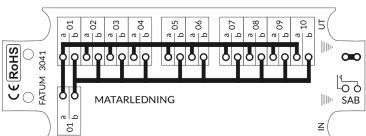
Maximum coverage	2 m radius (Up to 8mm and P8B)
Approvals	VdS EN-ST-000243 (Environmental IIIA, Grade 3), SBSC 17-132 (Class 3), F&P, FG, VdS G 121503 Class B
Supply voltage	5-15 VDC
Current consumption	1,5mA (3 mA in alarm state)
Alarm output	Transistor output
Alarm indication	LED
Tamper protection	Yes
Alarm hold time	Latching
Connection	Cable
Housing material	ABS Plastic
Colour	White and black
Operating temperature range	-40 - +55°C
Housing protection class	IP 67
Dimensions (H x Ø) mm	11 x 26
Grade	3



The GD 475-S has the same features as the GD 475 with transistor output and can be directly connected to a control panel via the junction box JB 103-6. The detector has a coiled cable with a modular connector that plugs into the junction box JB 103-6, which allows it to be quickly and easily disconnected from the detector loop when, for example, cleaning windows. The signal from the detector comes on pin 5 & 6 in JB 103-6. Which is connected polarity independent to IU 400 pin 3 & 4.

The cable is made of PUR, which means that it is more elastic and durable than a PVC cable.

Related products and accessories

	<p>CG 100 Cable Conduit</p>	
	<p>GDK 100 Adhesive Kit</p>	
	<p>GVT 500 DISCONTINUED - Replaced by GVT 5000 Test unit for GD 300/GD 400 Glass Break Detectors.</p>	
	<p>GVT 5000 Test Unit for Glass Break and Vibration Detectors</p>	
	<p>3041 DISTRIBUTION MODULE 1 > 10 PAIR</p>	 <p>The diagram shows a 16-pin connector with the following labels: CE (RoHS), RETURN, 3041, 01, 02, 03, 04, 05, 06, 07, 08, 09, 10, 11, 12, 13, 14, 15, 16, MATARLEDNING, IN, 0V, SAB, and IN.</p>

Related products and accessories

**28041**Distribution box
1 > 8 pairs