

# GD 470-S

**DISCONTINUED** - Replaced by GD 470-SJ

## Glass Break Detector for Laminated Glass, Glued, Relay output


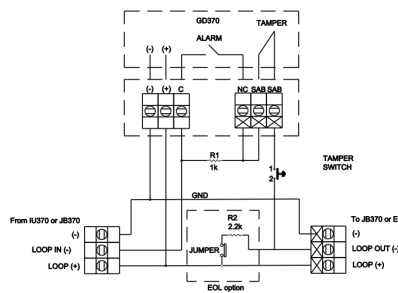
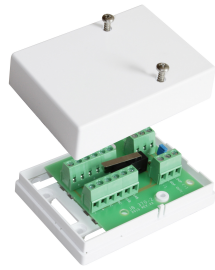
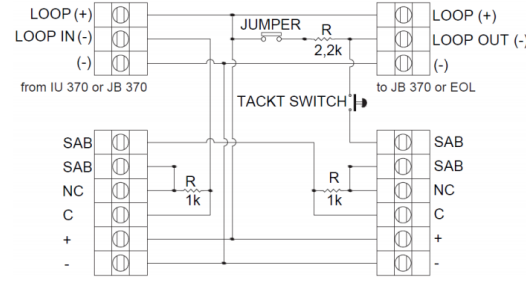

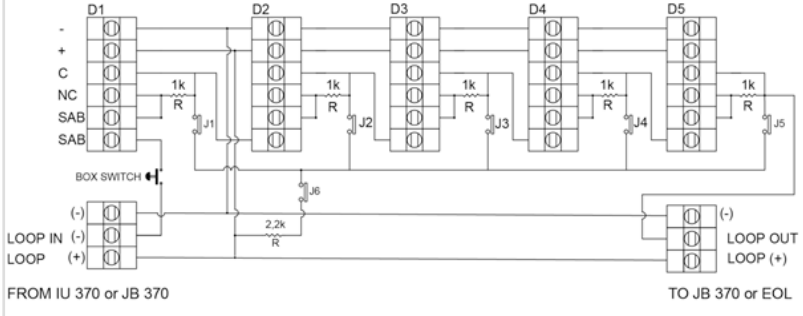


### Technical data

Maximum coverage	2 m radius (Up to 8mm and P8B)
Approvals	VdS EN-ST-000243 (Environmental IIIA, Grade 3), SBSC 17-132 (Class 3), F&P, FG, VdS G 121503 Class B
Supply voltage	5-15 VDC
Current consumption	1,5mA (3 mA in alarm state)
Alarm output	Transistor output
Alarm indication	LED
Tamper protection	Yes
Alarm hold time	Latching
Connection	Cable
Housing material	ABS Plastic
Colour	White
Operating temperature range	-40 - +70°C
Housing protection class	IP 67
Dimensions (H x Ø) mm	11 x 26
Grade	3



GD 470-S glass breaker detector with relay output has the same functions as GD 470 which can be connected directly to an input to the control panel. The detector has a spiral cable with modular contact which is connected in the junction box JB 103-4, which means that it can be easily and quickly disconnected from the detector loop at e.g. plastering a window

## Related products and accessories

	<p><b>JB 370</b></p> <p><b>DISCONTINUE</b> D - Replaced by <a href="#">JB 370-2</a></p> <p>Junction Box for GD 370 and GD 470 Glass Break Detectors</p>	
	<p><b>JB 370-2</b></p> <p>Junction Box for GD 370 and GD 470 Glass Break Detectors</p>	
	<p><b>JB 370-5</b></p> <p>Junction Box for GD 370 Glass Break Detector</p>	
	<p><b>CG 100</b></p> <p>Cable Conduit</p>	
	<p><b>GDK 100</b></p> <p>Adhesive Kit</p>	

**Related products and accessories****GVT 500**

**DISCONTINUED** - Replaced by [GVT 5000](#)

Test unit for GD 300/GD 400 Glass Break Detectors.

**GVT 5000**

Test Unit for Glass Break and Vibration Detectors