

## MC 340S


Magnetic Contact,  
Recessed mounting, NC

## Technical data

Installation method	Recessed mounting
Contact function	Normally Closed (NC)
Approvals	EN 50131-2-6 Grade 2, Class IIIA, VdS G 196670 Class B, INCERT B-582-1003, SBSC 9-200, Class 2, NF&A2P
Contact rating	48 VDC / 500 mA / 10 VA
Drill diameter mm	8
Magnet type	Neodymium (NdFeB)
Make distance (wood) mm	18
Make distance (steel) mm	X
Connection	Cable
Housing material	ABS Plastic
Colour	White
Operating temperature range	-40°C - +70°C
Housing protection class	IP 67
Contact dimensions (L x Ø) mm	26 x 9
Magnet dimensions (L x Ø) mm	14 x 9
Grade	2



MC 340S is a universal magnetic contact with NC function and an extra short magnet that can be used in both alarm and access control systems for monitoring e.g. doors and windows against unauthorized opening. Both the contact and the magnet part are in a water proof (IP67) plastic housing, which enables easy installation into wood without additional accessories.

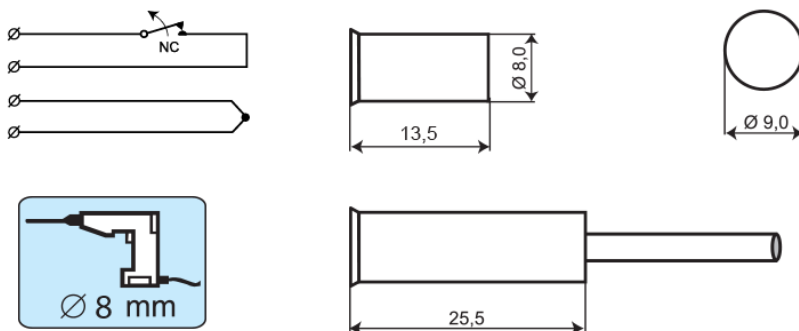

## ORDERING INFORMATION

Model	Description
MC 340S	Recessed high security contact, NC, 2 m cable
MC 340S-5	Recessed high security contact, NC, 5 m cable
MC 340S-10	Recessed high security contact, NC, 10 m cable