


MC 472


High Security Contact,
Surface mount, NC/NO

Technical data

Installation method	Surface mount
Contact function	Change-over (NC/NO)
Approvals	Class II, SBSC 9-217, Class 3/4, NBÚ CZ Typ 3, NBÚ SK Typ 3
Approvals	3
Contact rating	48 VDC / 250 mA / 5 VA
Magnet type	Alnico 5
Mounting on steel	Only with accessories
Make distance (wood) mm	21
Sabotage distance (wood) mm	10
Make distance (steel) mm	5
Connection	Screw terminals
Housing material	ABS Plastic
Operating temperature range	-40°C - +70°C
Housing protection class	IP 43
Contact dimensions (L x W x H) mm	65 x 20 x 15
Magnet dimensions (L x W x H) mm	65 x 14 x 10

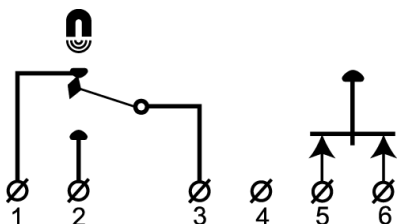

MC 472 is a surface mount high security contact with change over NC/NO function with 6 screw terminals and sabotage contact. The contact is specially designed for use in banks, museums, art galleries, stores, etc. It has screw terminals with wire protection and a sabotage contact. Enclosed are plastic spacers for installation on steel. The contact can be supplemented with different accessories such as brackets and extra strong magnets.

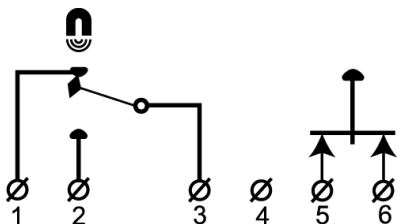

ORDERING INFORMATION

Model	Description
MC 472	High security contact, NC/NO, Surface mount