


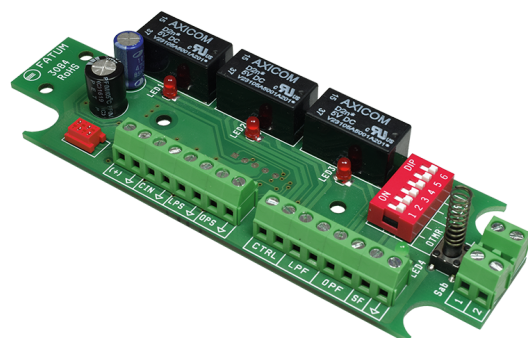

3089

ALARM MODULE WITH MOTOR LOCK

E-NR: 5010315

Motor lock alarms are used to control the locking bolt position in a motor lock and ensure that the engine lock is activated or deactivated.

The engine lock arm couples the burglar alarm with the engine lock so that the engine lock locks the bolt when the alarm is turned ON and locks the bolt when the alarm is turned OFF. For safe operation, there are two adjustable hours that give the flask time to exit and lock respectively back and unlock. The times are adjustable from 1-60 seconds each. If the lock is not working properly, it is indicated with separate relays. Can be used for both 12V and 24V engine locks. Suitable for access control systems for entrance doors, emergency exits, storage doors etc.

The terminal has screw connection with elevator function.

TECHNICAL DETAILS

Consumo de energía	45 mA @12 VDC
Conexión eléctrica - Tornillo	0,14 - 1 mm ²
Carga máxima - Alimentación	30 V / 2 A

ORDER INFORMATION

Model	E-NR	Description
3089.01	5010315	



SCHEMATICS

