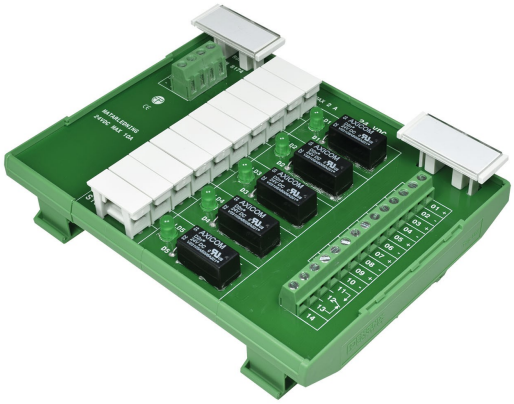


8174

E-NR: 5015498

FUSE TERMINAL 24 VDC FOR MOUNTING ON DIN RAIL

Fuse terminal DIN for installation of alarm and access systems.
Fuse terminal 24 VDC for power distribution, 10A to 5 sections, each fused with 2A. Relay in series with LED for indication of unbroken fuse, applies both + and -.
Summary alarm, NC or NO.
Separate terminal for incoming power cord and separate connection terminal for outgoing distribution cables.
2 labels for marking incoming and outgoing cables are mounted on the terminal (labels included).
Fire class according to UL 94 V-0.

The terminal has up to 2.5 mm^2 screw connection with a lift function for input and 1.5 mm^2 for output.

ADDITIONAL INFORMATION

Consumo de energía	30 mA @24 VDC
Dimensión del cable - entrada	0,2 – 2,5 mm2
Dimensión del cable - salida	0,14 – 1,5 mm2
Tipo de producto	Material de conexión
Carga máxima de salida	24 V / 2 A
Entorno	Interior
Tipo de accesorio	Placa de fusibles
Bornera de conexión	Protegido por fusible
Tipo de terminal	Tornillo/tornillo
Serie	Serie de módulos
Carcasa	DIN
Línea de productos	Fatum
Característica del producto	De superficie, Montaje en rack

ORDER INFORMATION

Model	E-NR	Description
8174.03	5015498	Bloque fusibles DIN, 24 VCC, Tornillo

SCHEMATICS

