

GD 330-S

E-NR: 6332523

Glass Break Detector, Glued

The GD 330-S has the same features as the GD 330 with relay output and can be directly connected to a control panel via the junction box JB 103-6.

The detector has a coiled cable with modular connector that plugs into the junction box JB 103-6, which allows it to be quickly and easily disconnected from the detector loop when, for example, cleaning windows.

For laminated and tempered glass please use GD 370 or GD 470.

ADDITIONAL INFORMATION

Certifications	EN 50131-2-7-2:2013 Grade 2, VdS class B – G192531
Tension de l'alimentation	8-15 VDC
Sortie alarme	NC
Cote commutateur	50 VDC / 100 mA
Indicateur d'alarme	LED
Indice de protection	IP 67
Type de produit	Détecteurs
Dimensions (L x W x H) mm	91 x 31 x 23
Environnement	Extérieur, Intérieur
Dimensions (h x Ø) mm	16 x 35
Groupe de produits	Bris de glace
Caractéristique du produit	Collé, En surface
Certification de sécurité et schémas d'agrément	EN, FG, SBSC, VdS
Classe de sécurité	2, B
Classe environnementale	IIIA


GD 330-S


5 November 2026

ORDER INFORMATION

Model	E-NR	Description
GD 330-S	6332523	
GD 330-SJ	6332524	

SCHEMATICS

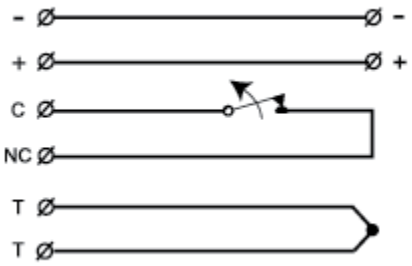

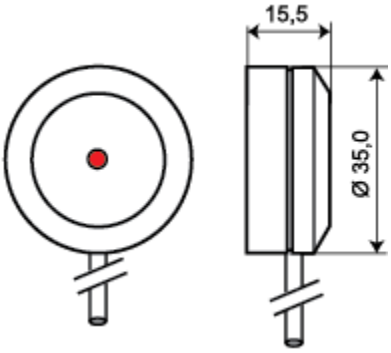

Alarmtech Sweden AB
Staffansväg 8B | 192 78 Sollentuna | Sweden
alarmtechglobal.com