

GD 335-S

E-NR: 6332528

Glass Break Detector, Glued

The GD 335-S has the same features as the GD 335 with transistor output and can be directly connected to a control panel via the junction box JB 103-4. The detector has a coiled cable with modular connector that plugs into the junction box JB 103-4, which allows it to be quickly and easily disconnected from the detector loop when, for example, cleaning windows.

For laminated glass use GD 475.

ADDITIONAL INFORMATION

Certifications	Class 2, EN 50131-2-7-2:2013 Grade 2, SBSC 10-32
Tension de l'alimentation	5-15 VDC
Indicateur d'alarme	LED
Température de fonctionnement	-40 – +70°C
Indice de protection	IP 67
Type de produit	Détecteurs
Dimensions (L x W x H) mm	91 x 31 x 23
Environnement	Extérieur, Intérieur
Dimensions (L x Ø) mm	11 x 27
Groupe de produits	Bris de glace
Caractéristique du produit	Collé, En surface
Certification de sécurité et schémas d'agrément	EN, FG, SBSC, VdS
Classe de sécurité	2, B
Classe environnementale	IIIA


GD 335-S

6 November 2026

ORDER INFORMATION

Model	E-NR	Description
GD 335-S	6332528	
GD 335-SJ	6332529	

SCHEMATICS

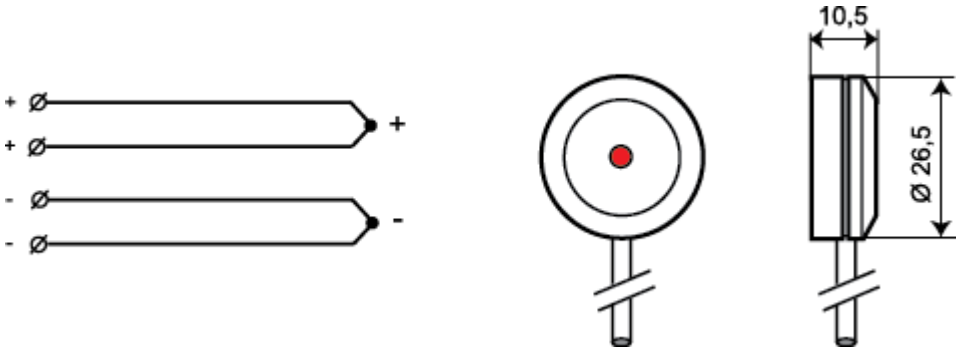

Alarmtech Sweden AB
Staffansväg 8B | 192 78 Sollentuna | Sweden
alarmtechglobal.com