

GD 370-S

E-NR: 6332533

Glass Break Detector for Laminated Glass, Glued

The GD 370-S has the same features as the GD 370 with relay output and can be directly connected to a control panel via the junction box JB 103-6.

The detector has a coiled cable with a modular connector that plugs into the junction box JB 103-6, which allows it to be quickly and easily disconnected from the detector loop when, for example, cleaning windows.

ADDITIONAL INFORMATION

Certifications	EN 50131-2-7-2:2013 Grade 2
Sortie alarme	NC
Cote commutateur	50 VDC / 100 mA
Indicateur d'alarme	LED
Indice de protection	IP 67
Dimensions (L x W x H) mm	91 x 31 x 23
Dimensions (h x Ø) mm	16 x 35

ORDER INFORMATION

Model	E-NR	Description
GD 370-S	6332533	
GD 370-SJ	6332534	

Alarmtech Sweden AB


Staffansväg 8B | 192 78 Sollentuna | Sweden


alarmtechglobal.com

GD 370-S

6 November 2026

SCHEMATICS

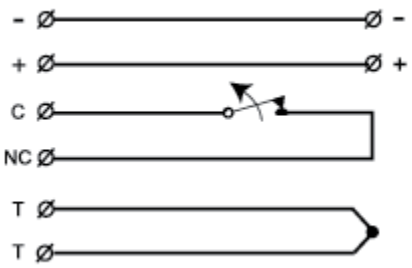

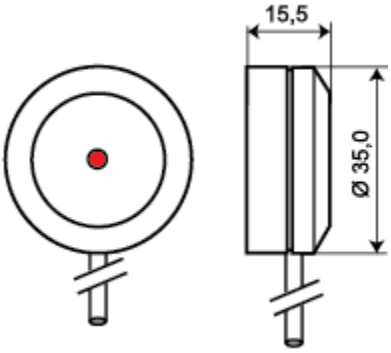

Alarmtech Sweden AB
Staffansväg 8B | 192 78 Sollentuna | Sweden
alarmtechglobal.com