

IU 300

E-NR: 6332540

Interface unit for GD 335 and GD 375

EN 3 VdS Klasse C

The IU 300 is an analyser and relay unit, used to connect the GD 335 and GD 375 glass break detectors to a control panel. Up to 20 detectors can be connected to the device.

IU 300 monitors resistance changes in a balanced circuit. It is possible to program it for either manual reset (Latch) or auto-reset after two seconds.

Note: An alarm from a single detector activates the alarm relay on the unit.

ADDITIONAL INFORMATION

Certifications	EN 501311, VDS G194021 class C
Tension de l'alimentation	9–15 VDC / 18–30 VDC
Sortie alarme	NC, Relay
Cote commutateur	35 VDC / 100 mA
Température de fonctionnement	-40°C – +70°C
Indice de protection	IP 41
Dimensions (L x W x H) mm	92 x 31 x 23
Matériau du coffret	ABS Plastic or Metal
Réinitialisation alarme	Voltage breaking / Control input / Manual
Grade	2
Type de produit	Détecteurs
Environnement	Intérieur
Groupe de produits	Bris de glace

IU 300


6 November 2026

Caractéristique du produit	En surface, Interface/Analyseur
Certification de sécurité et schémas d'agrément	EN, VdS
Classe de sécurité	2, B
Classe environnementale	II

ORDER INFORMATION

Model	E-NR	Description
IU 300	6332540	
IU 300-M	6332541	

SCHEMATICS

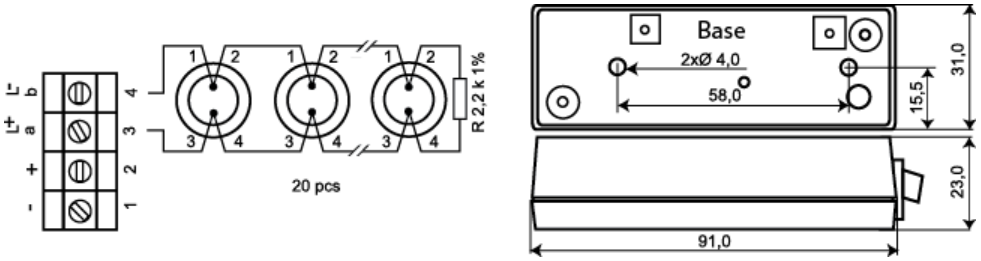

Alarmtech Sweden AB
Staffansväg 8B | 192 78 Sollentuna | Sweden
alarmtechglobal.com