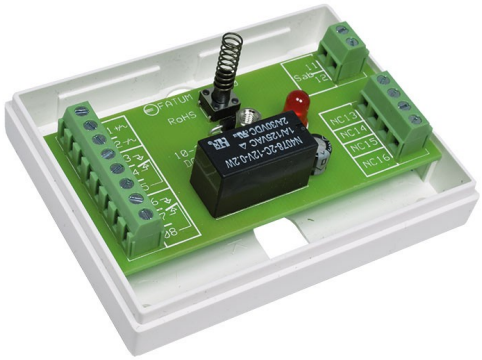


28220

E-NR: 5015299

RELAY BOX “MINI” 10-30 V DC/AC

Complete junction box for installation of alarm and access systems.

Anti-tampering protected junction box, 10-30V DC/AC, 1 relay with 2-pole switching.

LED in series with relay coil.

4 spare terminals available for further connections.

The box is flame-retardant according to UL 94 V-0.

The terminal has screw connection with elevator function.

TECHNICAL DETAILS

Current consumption	@12 VAC – 28.6 mA, @12 VDC – 11.7 mA, @24 VAC – 59.2 mA, @24 VDC – 23.2 mA
Dimensions (L x W x H) mm	58 x 76 x 27
Cable dimension - screw terminals	0,14 – 1 mm2
Input max. load	60 V / 2 A
Tamper switch max. load	50 mA
Min. relay voltage	10 V
Product type	Connection accessories
Environment	Indoor
Accessory type	Relay board
Connection terminal	Contact configuration, Tamper protection
Terminal type	Screw/screw
Series	Mini series

Enclosure	Plastic
Enclosure size	Mini
Product line	Fatum
Product feature	Surface-mounted

ORDER INFORMATION

Model	E-NR	Description
28220.03	5015299	Relay Box Mini; 10-30 V, DC/AC; Tamper Protected; Screw

SCHEMATICS

