


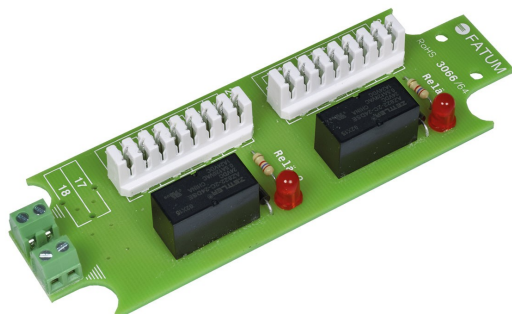

3064

E-NR: 5015326

RELAY MODULE WITH 2 RELAYS, 24 VDC

Terminal block for installation of tele and access systems.

Relay module with 2 relays, 24 VDC.

LED connected in parallel with relay coil. Protection Diode.

2 separate relays with 2 pole SPDT contacts.

4 separate connections intended for cable shield.

Available in different options, slot (LSA) or screw connection with lift function.

TECHNICAL DETAILS

Terminal type	LSA/LSA, Screw/screw
Current consumption	15 mA @24 VDC
Cable dimension - LSA slots (mm)	Ø 0,4 – 0,7
Cable dimension - screw terminals	0,14 – 1 mm ²
Input max. load	60 V / 2 A
Min. relay voltage	19,2 V
Dimensions (L x W)	116 x 40
Product type	Connection accessories
Environment	Indoor
Accessory type	Relay board
Connection terminal	Contact configuration
Product line	Fatum
Product feature	Surface-mounted



ORDER INFORMATION

Model	E-NR	Description
3064.01	5015326	Relay module 24 VDC, 2 Relays, LSA
3064.03	5015328	Relay module 24 VDC, 2 Relays, Screw

SCHEMATICS

