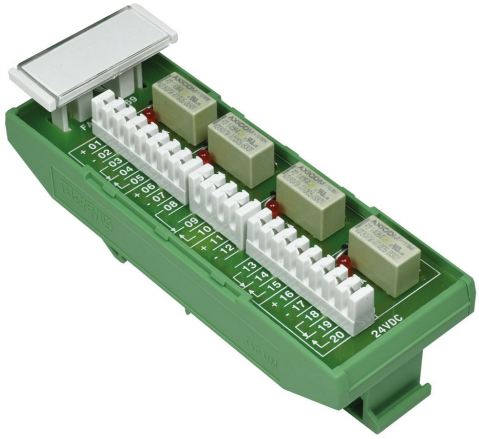

8169

E-NR: 5015492

RELAY TERMINAL 24 VDC FOR MOUNTING ON DIN RAIL

Relay terminal DIN for installation of alarm and access systems.

Relay module with 4 relays, 24 VDC.

LED connected in parallel with relay coil. Protection Diode.

- 4 separate relays with 1 pole SPDT contacts.

The label is mounted on the terminal block (label included).

The DIN is flame-retardant according to UL 94 V-0.

Available in different options, slot (LSA) or screw connection with lift function.

TECHNICAL DETAILS

Terminal type	LSA/LSA, Screw/screw
Current consumption	15 mA @24 VDC
Dimensions (L x W x H) mm	112 x 40 X 39
Cable dimension - LSA slots (mm)	Ø 0,4 – 0,7
Cable dimension - screw terminals	0,14 – 1 mm2
Input max. load	60 V / 2 A
Min. relay voltage	18 V
Product type	Connection accessories
Environment	Indoor

ALARMTECH

High quality security solutions

8169

26 November 2026

Accessory type	DIN-montage, Relay board
Connection terminal	Contact configuration
Series	Module series
Enclosure	DIN
Product line	Fatum
Product feature	Rack-mounted

ORDER INFORMATION

Model	E-NR	Description
8169.01	5015492	
8169.03	5015494	

SCHEMATICS

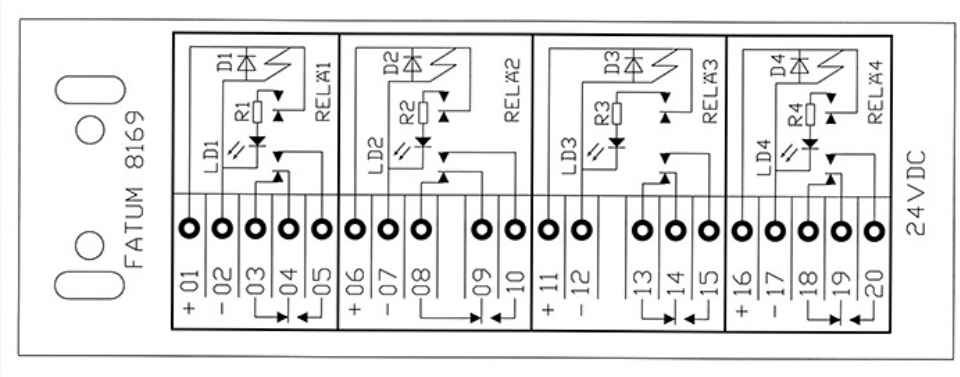

Alarmtech Sweden AB

Staffansväg 8B | 192 78 Sollentuna | Sweden

alarmtechglobal.com