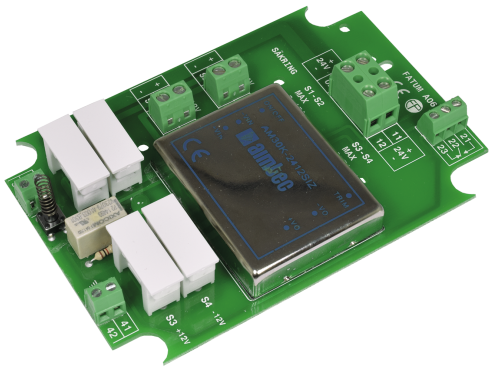


A.06

E-NR: 5015592

This product has been discontinued and replaced with: 3096.03

Terminal block for installation of alarm and access systems.

Anti-tampering protected DC/DC converter 24V to 12V, 2,5 A.

Inputs:

- 24 VD (01/02)

Outputs:

- 12 VDC fused (S3/S4)
- 24 VDC fused (S1/S2)
- 24 VDC not fused (11/12)

Tamper switch (31/32)

Operating indicator:

- In normal operation, outputs 22 and 23 are short-circuited
- In case of interruptions, outputs 21 and 22 are shorted.

Grounded connections: (41,42)

The terminal has screw connection with elevator function.

TECHNICAL DETAILS

Relay output	15A, 24 VDC/3
Input max. load	24 VDC
Tamper switch max. load	50 mA
Cable dimension - input	0,2 – 2,5 mm2
Cable dimension - output	0,14 – 1,5 mm2

Dimensions (L x W)	116 x 80

ORDER INFORMATION

Model	E-NR	Description
A.06	5015592	DC/DC Converter 24/12 V, Tamper Protected, Screw terminals

SCHEMATICS

