


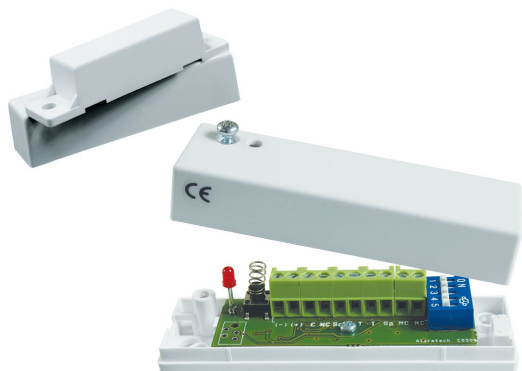

CD 500-R

This product has been discontinued and replaced with: [CD 550-R](#)

E-NR: 6332509

The CD 500 Shock Detector mounts on various objects providing their reliable protection. The CD 500 detects and indicates any attempt to break into the object using tools applied with much power, or even explosives. This detector senses momentary high amplitude vibrations. It includes a programmable event counter which makes the detector trip an alarm once the pre-programmed number of events (1, 2, 3 or 4) have occurred. Still the detection of an explosion trips an alarm regardless of the number of the counted events.

The CD 500 is based on an advanced signal processing algorithm microcontroller offering digital processing of the recorded events which translates into operation reliability and immunity to ambient interferences.

TECHNICAL DETAILS

Alarm output	NC
Contact rating	48 VDC / 100 mA
Dimensions (L x W x H) mm	80 x 23 x 20 mm
Current draw (standby)	8 mA
Current draw (alarm)	10 mA

ORDER INFORMATION

Model	E-NR	Description
CD 500	6332508	
CD 500-R	6332509	

