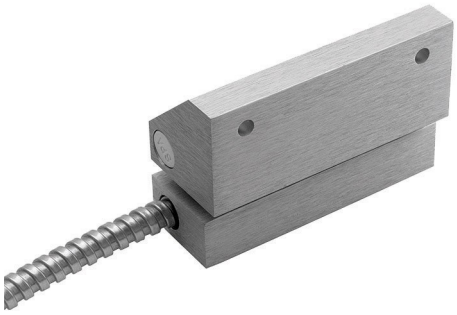


MC 240-S48

E-NR: 6332706

Magnetic Contact Set in Al Housing

The MC 240-S48 set is intended for exposed environments where a more durable magnetic contact is needed, such as garage doors, industrial gates, etc.The set consists of MC 240-C contact with a NC contact function installed in MC 200-4 Al housing and an extra strong magnet in MC 200-8 Al housing, which allows for a wide opening gap.

MC 240-S48 set has a 1 m long stainless steel cable protection (MC T4).

TECHNICAL DETAILS

Approvals	Class IIIA, EN 50131-2-6 Grade 2, INCERT B-582-1003, SBSC 9-196, VdS G 193513 Class B
Contact rating	48 VDC / 500 mA / 10 VA
Operating temperature	-40°C – +70°C
Housing protection class	IP 67
Make distance (wood) mm	42
Make distance (steel) mm	34 med montagevinkel MC-L eller MC-Z
Contact dimensions (L x W x H) mm	74 x 25 x 15
Magnet dimensions (L x W x H) mm	74 x 30 x 30
Grade	2
Product type	Detectors
Environment	Indoor, Outdoor
Product group	Magnetic contact
Product feature	Surface-mounted
Application area	
Security certification and approval schemes	EN, F&P, FG, INCERT, NBU, NF&A2P, SBSC, VdS

ALARMTECH

High quality security solutions

MC 240-S48


5 November 2026


Security class	2, B
Environmental class	IIIA
Contact function	NC
Mounting on steel	With accessories

ORDER INFORMATION

Model	E-NR	Description
MC 240-S48	6332706	Magnetic contact set, 6 m cable

SCHEMATICS



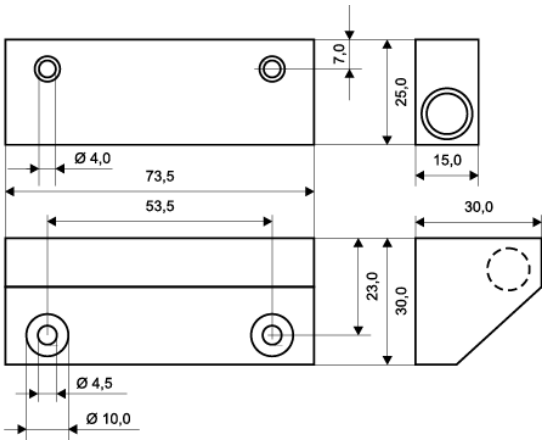

Alarmtech Sweden AB
Staffansväg 8B | 192 78 Sollentuna | Sweden
alarmtechglobal.com