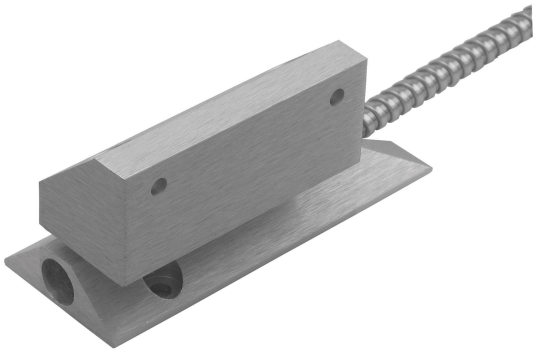


MC 240-S68

E-NR: 6332708

Magnetic Contact Set in Al Housing

The MC 240-S68 set is intended for exposed environments where a more durable magnetic contact is needed, such as garage doors, industrial gates of folding or overhead type, etc.The set consists of MC 240-C contact with NC contact function installed in MC 200-6 Al housing and an extra strong magnet in MC 200-8 Al housing,which allows for a wide opening gap.The part to be installed to the floor can bear the weight of a vehicle.

MC 240-S68 set has a 1 m long stainless steel Flexi-tube protection (MC T4).

TECHNICAL DETAILS

Approvals	Class IIIA, EN 50131-2-6 Grade 2, INCERT B-582-0013, SBSC 9-196, VdS G 193513 Class B
Contact rating	48 VDC / 500 mA / 10 VA
Operating temperature	-40°C – +70°C
Housing protection class	IP 67
Magnet type	Alnico 5
Make distance (wood) mm	45
Make distance (steel) mm	34
Contact dimensions (L x W x H) mm	104 x 40 x 15
Magnet dimensions (L x W x H) mm	74 x 30 x 30
Grade	2
Product type	Detectors
Environment	Indoor, Outdoor
Product group	Magnetic contact
Product feature	Surface-mounted
Application area	

ALARMTECH

High quality security solutions

MC 240-S68


5 November 2026

Security certification and approval schemes	EN, F&P, FG, INCERT, NBU, NF&A2P, SBSC, VdS
Security class	2, B
Environmental class	IIIA
Contact function	NC
Mounting on steel	With accessories

ORDER INFORMATION

Model	E-NR	Description
MC 240-S68	6332708	Magnetic contact set, 6 m cable

SCHEMATICS

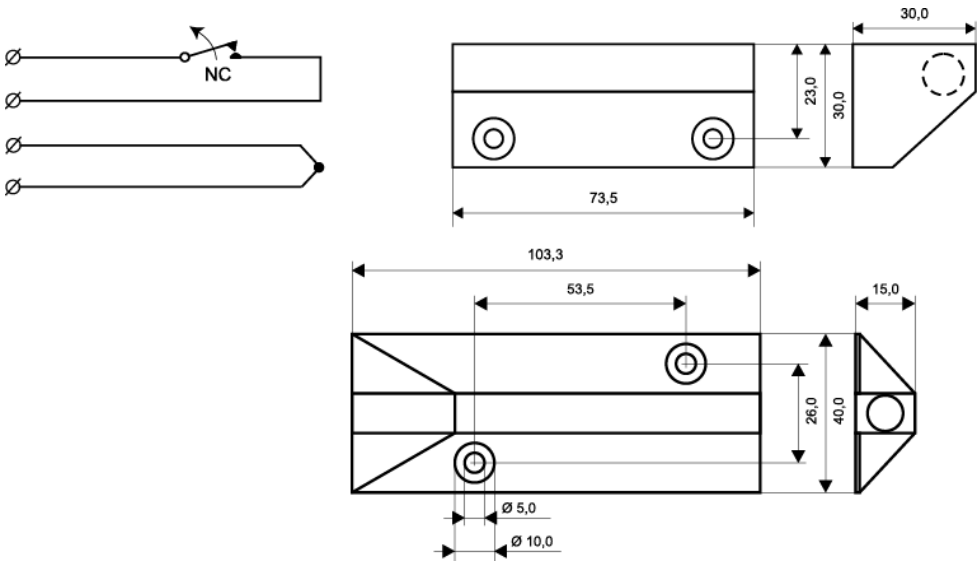

Alarmtech Sweden AB

Staffansväg 8B | 192 78 Sollentuna | Sweden

alarmtechglobal.com