

MC 250

E-NR: 6332720

Magnetic Contact in Small Format, Recessed mounting, NC

MC 250 is a universal magnetic contact in small format with NC function that can be used in both alarm and access control systems for monitoring e.g. doors and windows against unauthorized opening.

Both the contact and the magnet part are made of Al-alloy and formed in the shape of a threaded screw, which enables easy installation into wood or plastic.

With our extensive range of installation accessories it is easy to install the contact in different kinds of doors and windows.

TECHNICAL DETAILS

Cable length	2m, 6m, 10m
Approvals	Class 1/2,FG, Class IIIA, EN 50131-2-6 Grade 2, INCERT B-582-1003, SBSC 9-199, VdS G 193514 Class B
Contact rating	48 VDC / 500 mA / 5 VA
Operating temperature	-40°C – +70°C
Housing protection class	IP 67
Drill diameter mm	9-10
Make distance (wood) mm	19
Make distance (steel) mm	X
Contact dimensions (L x Ø) mm	23 x 11
Magnet dimensions (L x Ø) mm	15 x 11
Grade	2
Product type	Detectors
Environment	Indoor, Outdoor
Product group	Magnetic contact

ALARMTECH

High quality security solutions

MC 250


6 November 2026


Product feature	Flush-mounted
Application area	
Security certification and approval schemes	EN, F&P, FG, INCERT, SBSC, VdS
Security class	2, B
Environmental class	IIIA
Contact function	NC
Mounting on steel	With accessories


ORDER INFORMATION


Model	E-NR	Description
MC 250	6332720	Recessed magnetic contact, NC, 2 m cable
MC 250-6	6332721	Recessed magnetic contact, NC, 6 m cable
MC 250-10	6332722	Recessed magnetic contact, NC, 10 m cable
MC 250-P1K	6332726	Recessed magnetic contact, NC, 1K in parallel, 2 m cable
MC 250-P2,2K	6332727	Recessed magnetic contact, NC, 2,2K in parallel, 2 m cable

SCHEMATICS



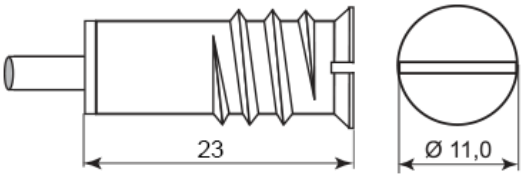





Alarmtech Sweden AB
Staffansväg 8B | 192 78 Sollentuna | Sweden
alarmtechglobal.com