

MC 270-S56

E-NR: 6332736

High Security Contact for floor mounting

The MC 270-S56 set is intended for exposed environments where a more durable high security contact is needed, such as garage doors, industrial gates etc.

The set consists of MC 270-C contact with NC contact function installed in MC 200-6 Al housing and an extra strong magnet in MC 200-5 Al housing, which allows for a wide opening gap. The part to be installed to the floor can bear the weight of a vehicle and the enclosed L-bracket (MC L) enables easy installation and a possibility to adjust the magnet part on the door. MC 270-S56 set contains a 1 m long stainless steel Flexi-tube protection (MC T4). Contact and magnet are paired. To ensure proper functionality, do not replace the contact or magnet alone.ies, the contact can even be installed in steel doors, safety valves, garage doors, etc. The contact part is sealed with special epoxy, making it water resistant.

TECHNICAL DETAILS

Approvals	Class 3/4,F&P, Class IIIA, EN 50131-2-6 Grade 3, INCERT B-582-0013, NBÚ CZ Typ 3, NBÚ SK Typ 3, SBSC 9-205, VdS G 116030 Class C
Contact rating	48 VDC / 500 mA / 10 VA
Operating temperature	-40°C – +70°C
Housing protection class	IP 67
Magnet type	Alnico 5
Make distance (wood) mm	36
Make distance (steel) mm	30
Housing material	Aluminium
Contact dimensions (L x W x H) mm	104 x 40 x 15
Magnet dimensions (L x Ø) mm	74 x 25 x 15
Sabotage distance (wood) mm	20
Sabotage distance (steel) mm	17

ALARMTECH

High quality security solutions

MC 270-S56


6 November 2026

Grade	3
Product type	Detectors
Environment	Indoor, Outdoor
Product group	Magnetic contact
Product feature	Surface-mounted
Application area	
Security certification and approval schemes	NBU
Security class	3
Environmental class	IIIA
Contact function	NC
Mounting on steel	With accessories

ORDER INFORMATION

Model	E-NR	Description
MC 270-S56	6332736	High security contact set, NC, 6 m cable

SCHEMATICS

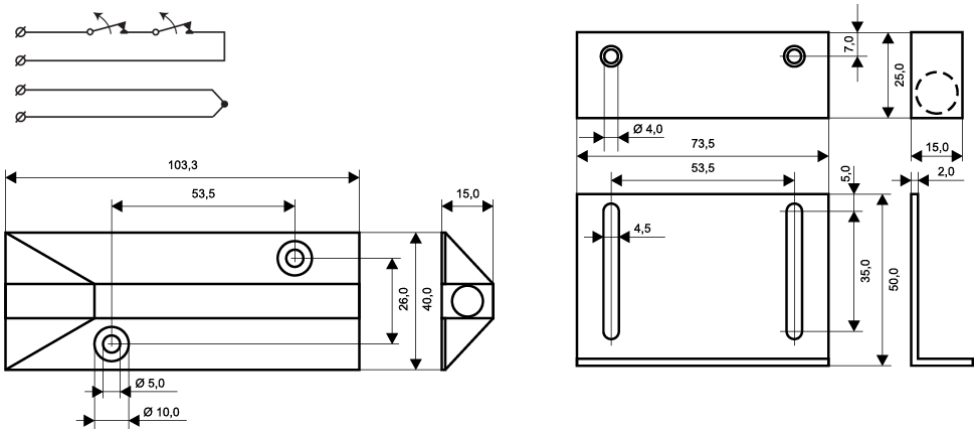

Alarmtech Sweden AB

Staffansväg 8B | 192 78 Sollentuna | Sweden

alarmtechglobal.com