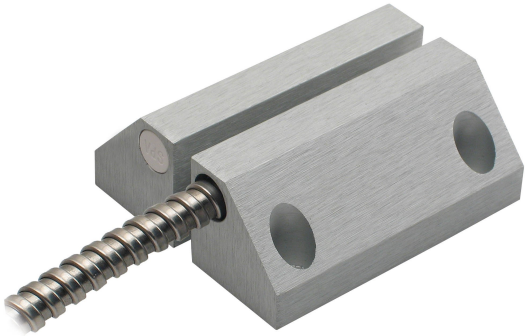


MC 270-S78

E-NR: 6332738

High Security Contact

The MC 270-S78 set is intended for exposed environments where a more durable high security contact is needed, such as steel and iron and industrial gates, etc. The set consists of MC 270-C contact with NC contact function installed in MC 200-7 Al housing and an extra strong magnet in MC 200-8 Al housing, which allows for a wide opening gap. MC 270-S78 set contains a 1 m long stainless steel Flexi-tube protection (MC T4). Contact and magnet are paired. To ensure proper functionality, do not replace the contact or magnet alone.

TECHNICAL DETAILS

Approvals	Class 3/4,F&P, Class IIIA, EN 50131-2-6 Grade 3, INCERT B-582-1003, NBÚ CZ Typ 3, NBÚ SK Typ 3, SBSC 9-205, VdS G 116032 Class C
Contact rating	48 VDC / 500 mA / 10 VA
Operating temperature	-40°C – +70°C
Housing protection class	IP 67
Magnet type	Alnico 5
Make distance (wood) mm	34
Make distance (steel) mm	25
Housing material	Aluminium
Contact dimensions (L x W x H) mm	74 x 30 x 30
Magnet dimensions (L x W x H) mm	74 x 30 x 30
Sabotage distance (wood) mm	20
Sabotage distance (steel) mm	17
Grade	3
Product type	Detectors
Environment	Indoor, Outdoor
Product group	Magnetic contact

ALARMTECH

High quality security solutions

MC 270-S78


9 November 2026


Product feature	Surface-mounted
Security certification and approval schemes	EN, F&P, NBU, SBSC, VdS
Security class	3, C
Environmental class	IIIA
Contact function	NC
Mounting on steel	Without accessories

ORDER INFORMATION

Model	E-NR	Description
MC 270-S78	6332738	High security contact set, NC, 6 m cable

SCHEMATICS



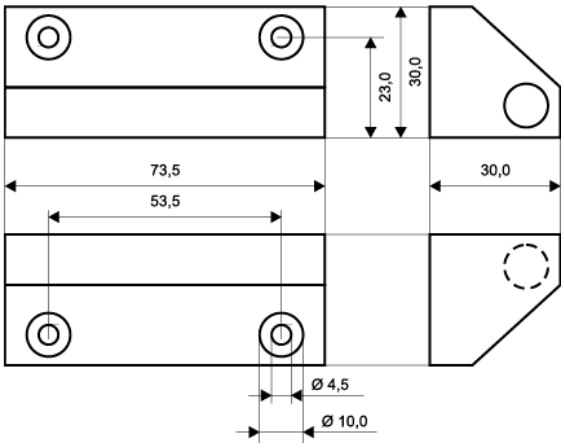

Alarmtech Sweden AB

Staffansväg 8B | 192 78 Sollentuna | Sweden

alarmtechglobal.com