

MC 340-S1

E-NR: 6332767

Magnetic Contact, Recessed mounting, NC

MC 340-S1 is a universal magnetic contact set with NC function that can be used in both alarm and access control systems for monitoring e.g. doors and windows against unauthorized opening. This set includes MC 340 and the small plastic flange set MC 300-S1 for recessed mounting with screw connection in non-magnetic door and window frames. Both the contact and the magnet part are in a water proof (IP 67) plastic housing.

TECHNICAL DETAILS

Cable length	2m, 5m, 10m
Approvals	Class 1/2,FG, Class IIIA, EN 50131-2-6 Grade 2, INCERT B-582-1003, NBÚ CZ Typ 2,NBÚ SK Typ 2,NF&A2P, SBSC 9-200, VdS G 196670 Class B
Contact rating	48 VDC / 500 mA / 10 VA
Operating temperature	-40°C – +70°C
Housing protection class	IP 67
Drill diameter mm	8
Make distance (wood) mm	21
Make distance (steel) mm	X
Contact dimensions (L x Ø) mm	26 x 8
Magnet dimensions (L x Ø) mm	26 x 8
Grade	2
Product type	Detectors
Environment	Indoor, Outdoor

ALARMTECH

High quality security solutions

MC 340-S1


6 November 2026

Product group	Magnetic contact
Product feature	Flush-mounted
Security certification and approval schemes	EN, F&P, FG, INCERT, NBU, NF&A2P, SBSC, VdS
Security class	2, B
Environmental class	IIIA
Contact function	NC

ORDER INFORMATION

Model	E-NR	Description
MC 340-S1	6332767	Recessed magnetic contact, NC, 2 m cable
MC 340-S1-5	6332768	Recessed magnetic contact, NC, 5 m cable
MC 340-S1-10	6332769	Recessed magnetic contact, NC, 10 m cable

SCHEMATICS

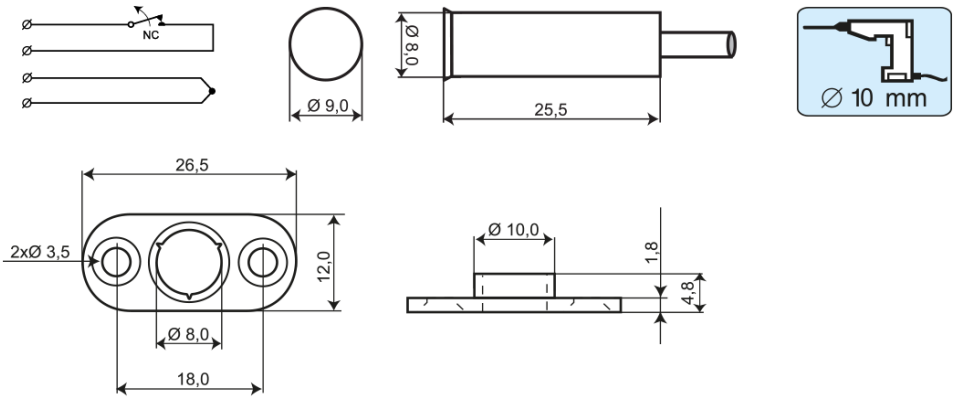

Alarmtech Sweden AB
Staffansväg 8B | 192 78 Sollentuna | Sweden
alarmtechglobal.com