

MC 340-S3

E-NR: 6332770

Magnetic Contact, Recessed/surface mounting, NC

MC 340-S3 is a universal magnetic contact set with NC function that can be used in alarm and access control systems for monitoring e.g. doors and windows against unauthorized opening. Both the contact and the magnet part are in a water proof (IP 67) plastic housing. This set includes MC 340 and the plastic housing set MC 300-S3 for surface mount installation, the contact and magnet are snapped in to the plastic parts.

TECHNICAL DETAILS

Cable length	2m, 5m, 10m
Approvals	Class 1/2,FG, Class IIIA, EN 50131-2-6 Grade 2, INCERT B-582-1003, NBÚ CZ Typ 2,NBÚ SK Typ 2,NF&A2P, SBSC 9-200, VdS G 196670 Class B
Contact rating	48 VDC / 500 mA / 10 VA
Operating temperature	-40°C – +70°C
Housing protection class	IP 67
Drill diameter mm	8
Make distance (wood) mm	17
Make distance (steel) mm	12
Contact dimensions (L x Ø) mm	26 x 9
Magnet dimensions (L x Ø) mm	26 x 9
Contact dimensions (L x W x H) mm	55 x 14 x 13 mm
Magnet dimensions (L x W x H) mm	55 x 14 x 13 mm
Grade	2
Product type	Detectors
Environment	Indoor, Outdoor
Product group	Magnetic contact
Product feature	Surface-mounted

ALARMTECH

High quality security solutions

MC 340-S3


4 November 2026

Application area	
Security certification and approval schemes	EN, F&P, FG, INCERT, NBU, NF&A2P, SBSC, VdS
Security class	2, B
Environmental class	IIIA
Contact function	NC

ORDER INFORMATION

Model	E-NR	Description
MC 340-S3	6332770	Recessed magnetic contact / Surface mount, NC, 2 m cable
MC 340-S3-5	6332771	Recessed magnetic contact / Surface mount , NC, 5 m cable
MC 340-S3-10	6332772	Recessed magnetic contact / Surface mount, NC, 10 m cable

SCHEMATICS

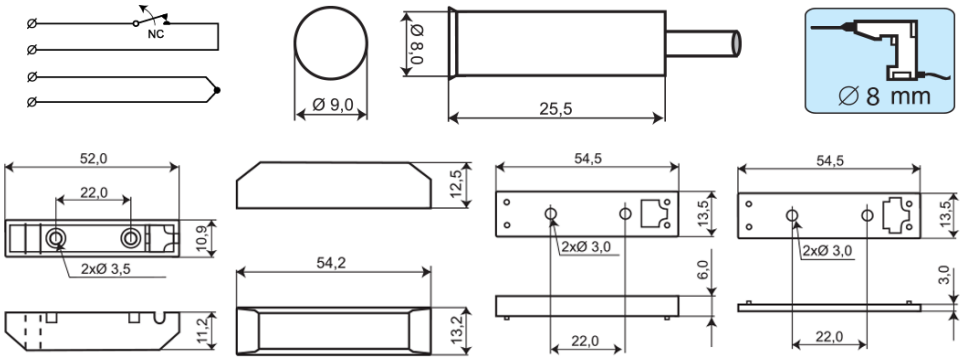

Alarmtech Sweden AB

Staffansväg 8B | 192 78 Sollentuna | Sweden

alarmtechglobal.com