

MC 340S

E-NR: 6332764

Magnetic Contact, Recessed mounting, NC

MC 340S is a universal magnetic contact with NC function and an extra short magnet that can be used in both alarm and access control systems for
monitoring e.g. doors and windows against unauthorized opening.

Both the contact and the magnet part are in a water proof (IP67) plastic housing, which enables easy installation into wood without additional accessories.

TECHNICAL DETAILS

Cable length	2m, 5m, 10m
Approvals	Class IIIA, EN 50131-2-6 Grade 2, INCERT B-582-1003, SBSC 9-200, VdS G 196670 Class B
Contact rating	48 VDC / 500 mA / 10 VA
Operating temperature	-40°C – +70°C
Housing protection class	IP 67
Drill diameter mm	8
Make distance (wood) mm	18
Make distance (steel) mm	X
Contact dimensions (L x Ø) mm	26 x 9
Magnet dimensions (L x Ø) mm	14 x 9
Grade	2
Product type	
Environment	Outdoor

ALARMTECH

High quality security solutions

MC 340S


27 November 2026

Product group	
Product feature	
Contact function	NC
Mounting on steel	With accessories

ORDER INFORMATION

Model	E-NR	Description
MC 340S	6332764	Recessed high security contact, NC, 2 m cable
MC 340S-5	6332765	Recessed high security contact, NC, 5 m cable
MC 340S-10	6332766	Recessed high security contact, NC, 10 m cable

SCHEMATICS

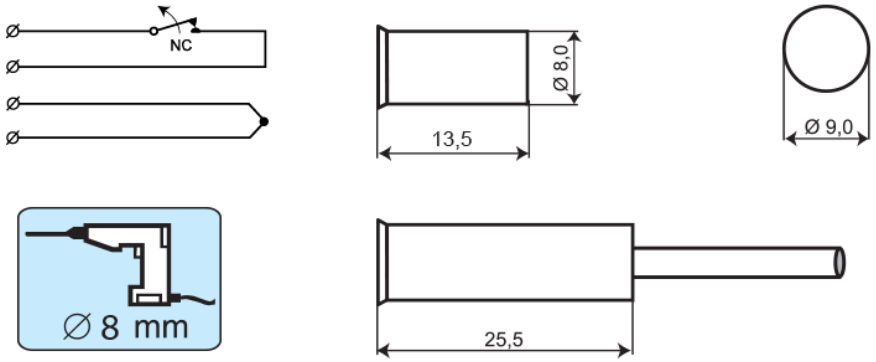

Alarmtech Sweden AB
Staffansväg 8B | 192 78 Sollentuna | Sweden
alarmtechglobal.com