

MC 440-BL

E-NR: 6309776

Magnetic Contact,
Surface mount, NC

MC 440 is a surface mount magnetic contact with NC function and 4 screw terminals. It can be used in both alarm and access control systems for monitoring e.g. doors and windows against unauthorized opening. It is equipped with tamper protection. The magnetic contact has a wide gap which allows for installation on most materials such as wood, plastic, aluminium and steel. Enclosed are plastic spacers for installation on steel. The contact can be supplemented with different accessories such as brackets and extra strong magnets. If additional spacers are needed use MC 400-6
and/or MC 400-7. With our extensive range of installation accessories it is easy to install the contact either recessed or as a surface mount on metal and other materials.

TECHNICAL DETAILS

ALARMTECH

High quality security solutions

MC 440-BL

14 November 2026

Approvals	Class 2, class II, CNPP 2124030003A0, EN 50131-2-6 Grade 2, F&P, GRADE 2 + RTC, INCERT B-582-1003, NF&A2P, SBSC 9-210
Contact rating	48 VDC / 400 mA / 10 VA
Operating temperature	+5°C – +40°C
Housing protection class	IP 43
Magnet type	Alnico 5
Make distance (wood) mm	37
Make distance (steel) mm	24
Contact dimensions (L x W x H) mm	65 x 20 x 15
Magnet dimensions (L x W x H) mm	65 x 15 x 14,5
Product type	Detectors
Environment	Indoor
Product group	Magnetic contact
Product feature	Surface-mounted
Application area	
Security certification and approval schemes	EN, F&P, FG, INCERT, NF&A2P, SBSC
Security class	2
Environmental class	II
Contact function	NC
Mounting on steel	With accessories

ORDER INFORMATION

Model	E-NR	Description
MC 440-BL	6309776	MC 440 black design

SCHEMATICS


Alarmtech Sweden AB

Staffansväg 8B | 192 78 Sollentuna | Sweden

alarmtechglobal.com

MC 440-BL

14 November 2026

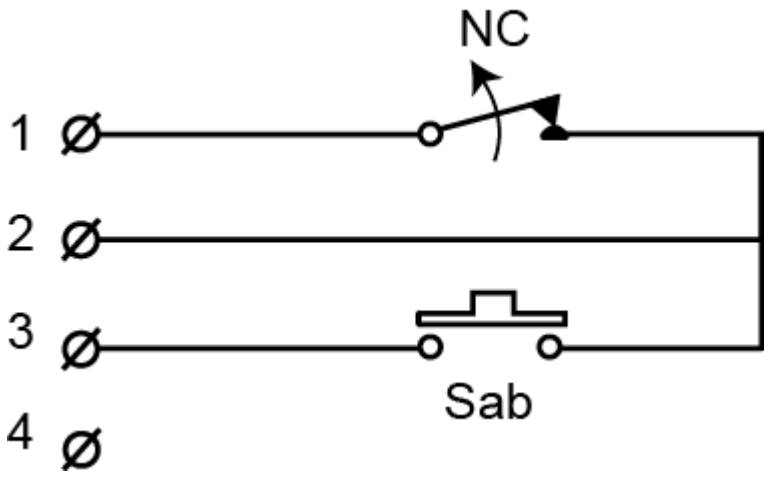

Alarmtech Sweden AB
Staffansväg 8B | 192 78 Sollentuna | Sweden
alarmtechglobal.com