

MC 440-T

E-NR: 6332816

Magnetic Contact, Surface mount, NC

MC 440-T is a surface mount magnetic contact with NC function and with 6 screw connections. It can be used in both in alarm and access control systems for monitoring e.g. doors and windows against unauthorised opening.

It has screw terminals with wire protection and a sabotage contact. Enclosed are plastic spacers for installation on steel. The contact can be supplemented with different accessories such as brackets and extra strong magnets.

TECHNICAL DETAILS

Approvals	Class 2, class II, CNPP 2124030003B0, EN 50131-2-6 Grade 2, FG, GRADE 2 + RTC, INCERT B-582-1003, NF&A2P, SBSC 9-211
Contact rating	48 VDC / 500 mA / 10 VA
Housing protection class	IP 43
Make distance (wood) mm	31
Make distance (steel) mm	16
Contact dimensions (L x W x H) mm	65 x 20 x 15
Magnet dimensions (L x W x H) mm	65 x 14 x 10
Grade	2
Product type	Detectors
Environment	Indoor
Product group	Magnetic contact

ALARMTECH

High quality security solutions

MC 440-T

24 November 2026

Product feature	Surface-mounted
Application area	
Security certification and approval schemes	EN, FG, INCERT, NF&A2P, SBSC
Security class	2
Environmental class	II
Contact function	NC
Mounting on steel	With accessories

ORDER INFORMATION

Model	E-NR	Description
MC 440-T	6332816	

SCHEMATICS

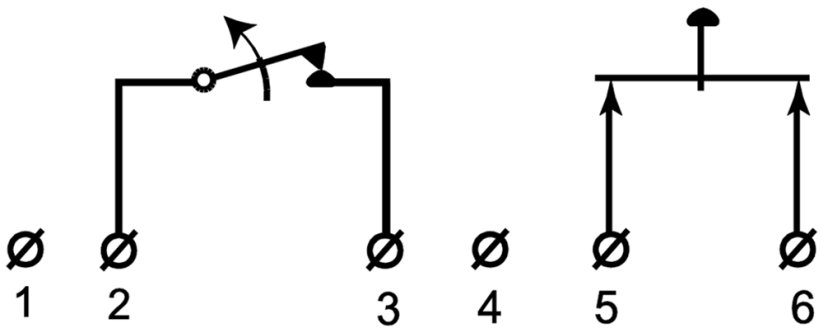

Alarmtech Sweden AB

Staffansväg 8B | 192 78 Sollentuna | Sweden

alarmtechglobal.com