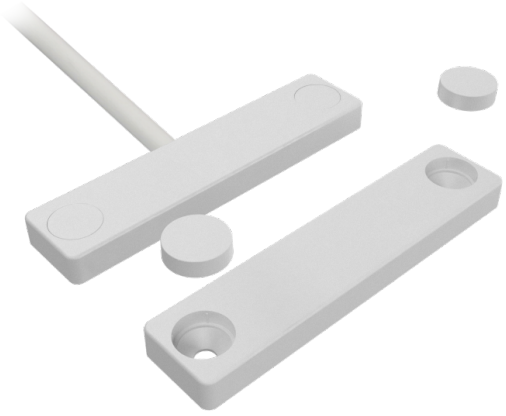


MC 740-E

E-NR: 6309934

Magnetic Contact, Surface mount, NC

MC 740-E is a small and thin magnetic contact with NC function that can be used in both alarm and access control systems for monitoring e.g. doors and windows against unauthorized opening.

Both the contact and the magnet part are in a water proof (IP 67) plastic housing.

The small and thin format makes it especially easy to install in limited spaces, e.g. on shutters and drawers.

With lid for the screw holes.

TECHNICAL DETAILS

Cable length	2m, 6m, 10m
Approvals	Class 1/2,F&P, class B, Class IIIA, CNPP 2124030004A0, EN 50131-2-6 Grade 2, FG, GRADE 2 + RTC, INCERT B-582-1003, NF&A2P, SBSC 9-216, VdS G 116504
Contact rating	48 VDC / 500 mA / 10 VA
Operating temperature	-40°C – +70°C
Housing protection class	IP 67
Make distance (wood) mm	37
Make distance (steel) mm	X
Contact dimensions (L x W x H) mm	60 x 14 x 5
Magnet dimensions (L x W x H) mm	60 x 14 x 5
Grade	2
Product type	Detectors
Environment	Indoor, Outdoor
Product group	Magnetic contact

ALARMTECH

High quality security solutions

MC 740-E


5 November 2026

Product feature	Surface-mounted
Application area	
Security certification and approval schemes	EN, F&P, FG, INCERT, NF&A2P, SBSC, VdS
Security class	2, B
Environmental class	IIIA
Contact function	NC
Mounting on steel	With accessories

ORDER INFORMATION

Model	E-NR	Description
MC 740-E	6309934	Magnetic contact, surface mount, NC, 2 m cable
MC 740-E-6	6309936	Magnetic contact, surface mount, NC, 6 m cable
MC 740-E-10	6309935	Magnetic contact, surface mount, NC, 10 m cable
MC 740-E-BL		Magnetic contact, black, surface mount, NC, 2 m cable
MC 740-E-6BL		Magnetic contact, black, surface mount, NC, 6 m cable

SCHEMATICS

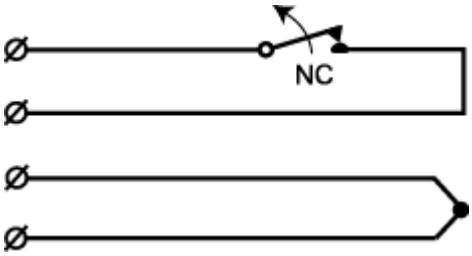

Alarmtech Sweden AB

Staffansväg 8B | 192 78 Sollentuna | Sweden

alarmtechglobal.com