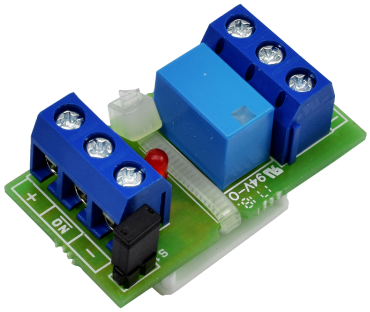


# RC 2

**E-NR: 6332878**

Relay card 10-30 V

The RC 2 is a very compact and universal relay card with alternating (NC/NO) relay. Connection is provided via screw terminal with wire protection. Transistor control of the relay means a very low control signal is required (1 mA). An activated relay is indicated via a LED.

## TECHNICAL DETAILS

| | |
|---|---|
| **Series** | |
| **Current consumption** | 16 mA @12 VDC / 20 mA @30 VDC |
| **Contact rating** | 1A, 30 V DC/AC, 30 VA |
| **Operating temperature** | -20 – +50°C |
| **Dimensions (L x W x H) mm** | 37 x 21 x 13 |
| **Relay output** | NC/NO |
| **Product type** | Connection accessories |
| **Connection** | Skruvplint |
| **Environment** | Indoor |
| **Accessory type** | Relay board |
| **Connection terminal** | Contact configuration |
| **Product line** | Alarmtech |
| **Product feature** | Surface-mounted |

## ORDER INFORMATION

| Model | E-NR | Description |
|---|---|---|
| RC 2 | 6332878 | |

## SCHEMATICS

