

6139

**DISCONTINUED** - Replaced by 28319.03**RESET SET RECESSED, FOR WALLBOX****Technical data**

Dimensions (L x W x H) mm	86 x 86 x 42
Cable dimension - screw terminals	0,14 - 1 mm <sup>2</sup>
Input max. load	60 V / 2 A
Tamper switch max. load	50 mA
Anti-tamper protection	Yes

**Complete reset set for installation of alarm and access systems.**

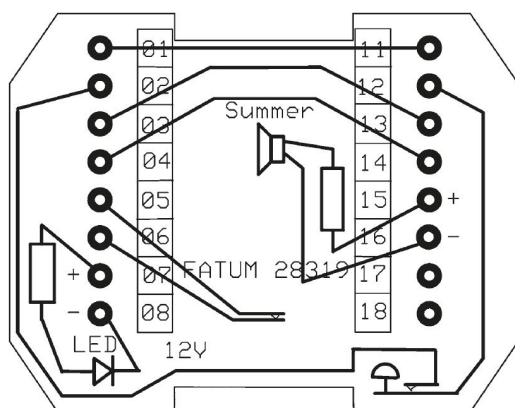
Anti-tampering protected reset set, with LED display, buzzer and switch which breaks its output at pressed position, is used, for example, with advantage for resetting relay glass break detectors.

Suitable for 70 mm wall box with 60 mm hole spacing.

The box is flame-retardant according to UL 94 V-0.

Cover (86x86 mm) included.

The terminal has screw connection with lift function.

**ORDERING INFORMATION**

Code	Description
6139.03	Anti-tampering protected reset set; 70 mm; Screw terminals