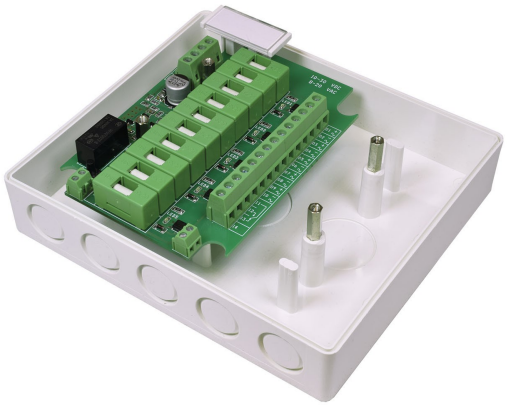


# 4103.7103

**E-NR: 5010376**

FUSE BOX 10-30 V DC/AC

**Complete junction box for installation of alarm and access systems.**
Anti-tampering protected fuse box for distributing power supply 10 A to 5 sections.
The fuse module 3071 is designed for power distribution.
It contains a dual input input for connection to power supply and five independent secured outputs. The outputs (+) and (-) of each channel are secured with separate fuses.
The normal state of each channel is signaled with green LEDs. Errors detected in each channel (lack of voltage or activated fuse) signaled by common red LED and switching
relay.
Label terminal on the board included. The box is flame-retardant according to UL 94 V-0. The terminal has screw connection with elevator function.

## TECHNICAL DETAILS

| | |
|---|---|
| **Supply voltage** | 8-20 VAC |
| **Current consumption** | 23 mA @12 VDC, 33 mA @24 VDC |
| **Dimensions (L x W x H) mm** | 134 x 152 x 50 |
| **Number of channels** | 5 |
| **Cable dimension - input** | 0,2 – 2,5 mm2 |
| **Cable dimension - output** | 0,14 – 1,5 mm2 |
| **Max. load per channel** | 30 V / 2 A |
| **Input current max.** | 10 A |
| **Product type** | Connection accessories |
| **Environment** | Indoor |
| **Accessory type** | Fuse board |
| **Connection terminal** | Fused |
| **Series** | Module series |

ALARMTECH

High quality security solutions

# 4103.7103


7 November 2026

| | |
|---|---|
| **Enclosure** | Plastic |
| **Enclosure size** | Module with 3 terminal blocks |
| **Product line** | Fatum |
| **Product feature** | Surface-mounted |

## ORDER INFORMATION

| Model | E-NR | Description |
|---|---|---|
| 4103.7103 | 5010376 | Fuse box 10-30V DC/AC, screw |

## SCHEMATICS

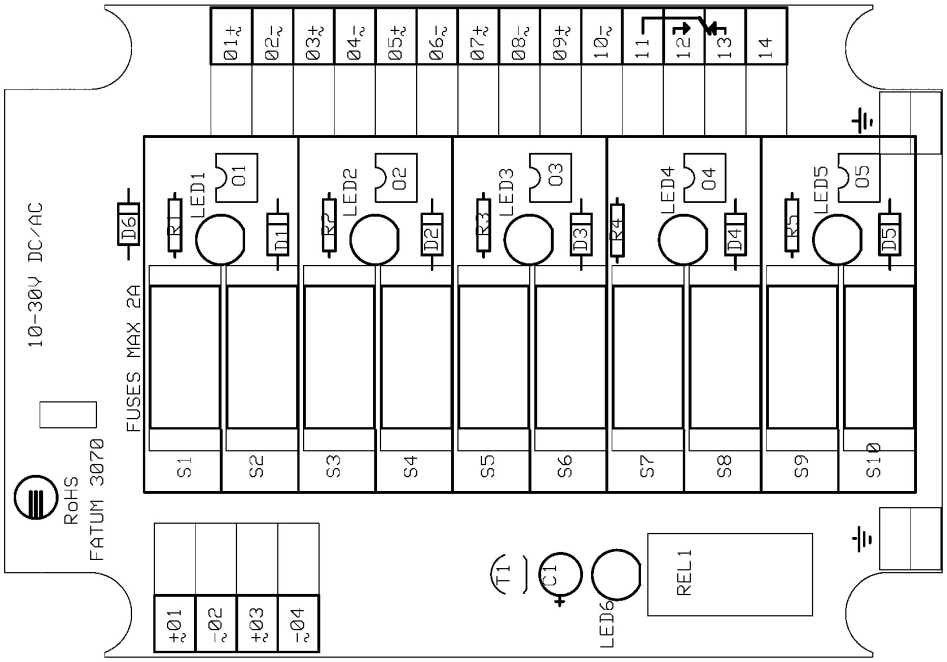



Alarmtech Sweden AB

Staffansväg 8B | 192 78 Sollentuna | Sweden

alarmtechglobal.com