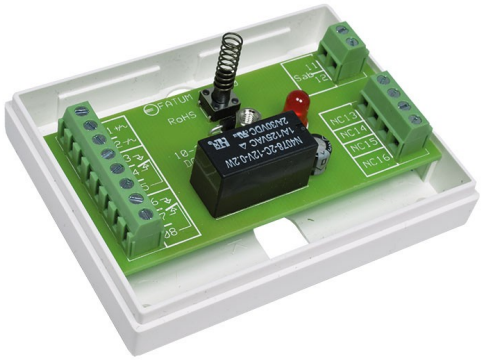


28220

E-NR: 5015299

RELAY BOX “MINI” 10-30 V DC/AC

Complete junction box for installation of alarm and access systems.

Anti-tampering protected junction box, 10-30V DC/AC, 1 relay with 2-pole switching.

LED in series with relay coil.

4 spare terminals available for further connections.

The box is flame-retardant according to UL 94 V-0.

The terminal has screw connection with elevator function.

ADDITIONAL INFORMATION

Consommation électrique	@12 VAC – 28.6 mA, @12 VDC – 11.7 mA, @24 VAC – 59.2 mA, @24 VDC – 23.2 mA
Dimensions (L x W x H) mm	58 x 76 x 27
Section câble - borniers	0,14 – 1 mm2
Tension d’entrée max.	60 V / 2 A
Intensité autoprotection max.	50 mA
Tension min. du relais	10 V
Type de produit	Matériel de raccordement
Environnement	Intérieur
Type d'accessoire	Carte relais
Bornier de connexion	Configuration des contacts, Protection contre le sabotage
Type de bornier	Vis/vis
Série	Mini-série

Boîtier	Plastique
Taille du boîtier	Mini
Gamme de produits	Fatum
Caractéristique du produit	En surface

ORDER INFORMATION

Model	E-NR	Description
28220.03	5015299	Relay Box Mini; 10-30 V, DC/AC; Tamper Protected; Screw

SCHEMATICS

