

IU 370

E-NR: 6332542

Interface unit for GD 330/ GD 370/ GD 470

The IU 300 is an analyser and relay unit, used to connect the GD 330, GD 370 and GD 470 glass break detectors to a control panel. p to 10 detectors (max. 8 GD 470) can be connected to an analyzer unit.

IU 370 monitors resistance changes in a balanced circuit. It is possible to program it for either manual reset (Latch) or auto-reset after two seconds.

Note: An alarm from a single detector activates the alarm relay on the unit.

ADDITIONAL INFORMATION

Tension de l'alimentation	10–15 VDC
Sortie alarme	NC, Relay
Cote commutateur	35 VDC / 100 mA
Indicateur d'alarme	LED
Indice de protection	IP 41
Dimensions (L x W x H) mm	92 x 31 x 23
Type de produit	Détecteurs
Autoprotection	Yes
Environnement	Intérieur
Groupe de produits	Bris de glace
Caractéristique du produit	En surface, Interface/Analyseur


IU 370


6 November 2026

ORDER INFORMATION

Model	E-NR	Description
IU 370	6332542	
IU 370-M	6332543	

SCHEMATICS

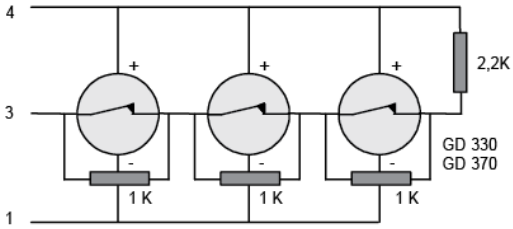

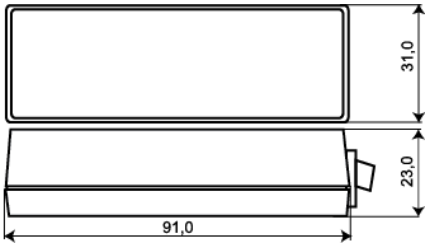

Alarmtech Sweden AB
Staffansväg 8B | 192 78 Sollentuna | Sweden
alarmtechglobal.com