


# GD 330

**E-NR: 6332520**

Glass Break Detector, Glued

The GD 330 is a glass break detector with relay output that can be directly connected to a control panel. It is especially designed for monitoring shop windows, sliding glass doors, ordinary windows and other exposed glass surfaces, both in public spaces and private homes. It can be used on windows with protective film if the detector is mounted directly onto the glass and not on the film (a 5-10 cm hole must be cut out the film). It can also be used on glass cabinets to protect various types of equipment. The GD 330 glass break detector is activated when the glass is shattered or broken and is highly resistant to interference with the glass or in its immediate environment, which makes it ideal for 24-hour monitoring. Its circular design guarantees correct positioning. The GD 330 is glued to the glass pane and each detector is supplied with a stencil to mark the mounting location, a glue applicator and cable clamps for quick and easy installation.

**For laminated and tempered glass please use GD 370 or GD 470.**

## TECHNICAL DETAILS

| | |
|---|---|
| **Cable length** | 3m, 6m, 10m |
| **Maximum coverage** | 2 m radius (standard 3 mm glass) |
| **Approvals** | EN 50131-2-7-2:2013 Grade 2, SBSC 10-31 Klass 2, VdS class B – G192531 |
| **Supply voltage** | 8-15 VDC |
| **Current consumption** | 5 mA (12 mA alarm) |
| **Contact rating** | 50 VDC / 100 mA |
| **Alarm indication** | LED |
| **Operating temperature** | -40°C – +70°C |
| **Housing protection class** | IP 67 |
| **Dimensions (H x Ø) mm** | 16 x 35 |

ALARMTECH

High quality security solutions

# GD 330


4 November 2026


| | |
|---|---|
| **Product type** | Detectors |
| **Grade** | 2 |
| **Environment** | Indoor, Outdoor |
| **Product group** | Glass break |
| **Product feature** | Adhesive-mounted, Surface-mounted |
| **Application area** | |
| **Security certification and approval schemes** | EN, FG, SBSC, VdS |
| **Security class** | 2, B |
| **Environmental class** | IIIA |

## ORDER INFORMATION

| Model | E-NR | Description |
|---|---|---|
| GD 330 | 6332520 | Glass break detector with relay output, glued, 3 m cable |
| GD 330-6 | 6332521 | Glass break detector with relay output, glued, 6 m cable |
| GD 330-10 | 6332522 | Glass break detector with relay output, glued, 10 m cable |

## SCHEMATICS

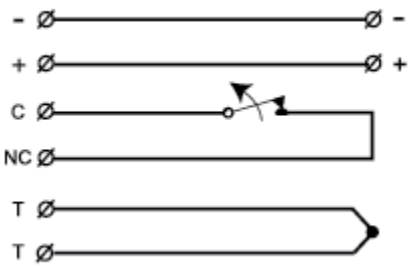

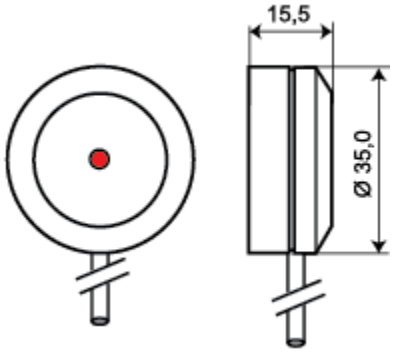
Alarmtech Sweden AB

Staffansväg 8B | 192 78 Sollentuna | Sweden

alarmtechglobal.com