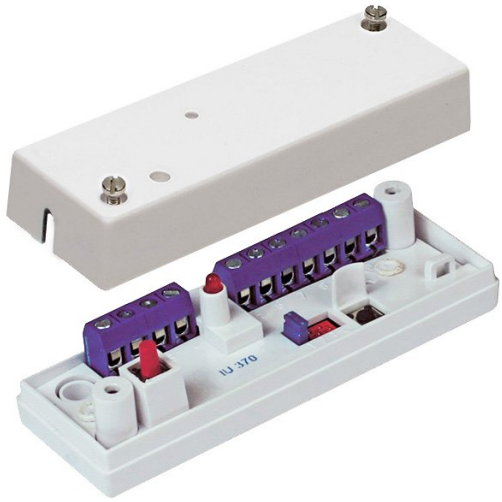


IU 370

E-NR: 6332542

Interface unit for GD 330/ GD 370/ GD 470

The IU 370 is an analyser and relay unit, used to connect the GD 330, GD 370 and GD 470 glass break detectors to a control panel. Up to 10 detectors (max. 8 GD 470) can be connected to an analyzer unit.

IU 370 monitors resistance changes in a balanced circuit. It is possible to program it for either manual reset (Latch) or auto-reset after two seconds.

Note: An alarm from a single detector activates the alarm relay on the unit.

TECHNICAL DETAILS

Supply voltage	10–15 VDC
Alarm output	NC, Relay
Contact rating	35 VDC / 100 mA
Alarm indication	LED
Housing protection class	IP 41
Dimensions (L x W x H) mm	92 x 31 x 23
Product type	Detectors
Tamper protection	Yes
Environment	Indoor
Product group	Glass break
Product feature	Interface/Analyzer, Surface-mounted

ALARMTECH

High quality security solutions


IU 370


6 November 2026

ORDER INFORMATION

Model	E-NR	Description
IU 370	6332542	Analyser unit for GD 330/ GD 370/ GD 470, white plastic housing
IU 370-M	6332543	Analyser unit for GD 330/ GD 370/ GD 470, grey metal housing

SCHEMATICS

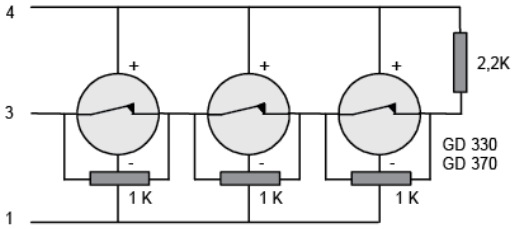

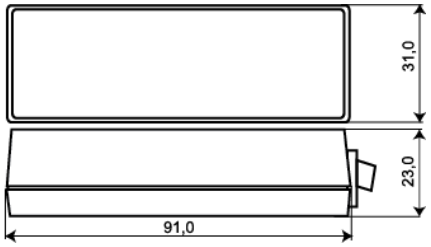

Alarmtech Sweden AB

Staffansväg 8B | 192 78 Sollentuna | Sweden

alarmtechglobal.com