

MC 347

E-NR: 6332784

Magnetic Contact, Recessed mounting, 2 x NC

MC 347 is a universal magnetic contact with double NC function that can be used in both alarm and access control systems for monitoring e.g. doors and windows against unauthorized opening. Both the contact and the magnet part are in a water proof (IP 67) plastic housing, which enables easy installation into wood without additional accessories. With our extensive range of installation accessories it is easy to install the contact either recessed or as a surface mount on metal and other materials.

TECHNICAL DETAILS

Cable length	2m, 5m, 10m
Approvals	Class IIIA, CNPP 2124030002C0, EN 50131-2-6 Grade 2, GRADE 2 + RTC, INCERT B-582-1003, NF&A2P, SBSC 9-204
Contact rating	48 VDC / 500 mA / 10 VA
Operating temperature	-40°C – +70°C
Housing protection class	IP 67
Drill diameter mm	8
Make distance (wood) mm	18
Make distance (steel) mm	X
Contact dimensions (L x Ø) mm	36 x 9
Magnet dimensions (L x Ø) mm	26 x 6
Grade	2
Product type	Detectors
Environment	Indoor, Outdoor
Product group	Magnetic contact
Product feature	Flush-mounted
Security certification and approval schemes	EN, FG, INCERT, NBU, NF&A2P, SBSC

ALARMTECH

High quality security solutions

MC 347


6 November 2026

Security class	2
Environmental class	IIIA
Contact function	2xNC
Mounting on steel	With accessories

ORDER INFORMATION

Model	E-NR	Description
MC 347	6332784	Recessed magnetic contact, 2 x NC, 2 m cable
MC 347-5	6332785	Recessed magnetic contact, 2 x NC, 5 m cable
MC 347-10	6332786	Recessed magnetic contact, 2 x NC, 10 m cable
MC 347-C	6332787	Recessed contact part without magnet, 2 x NC, 5 m cable

SCHEMATICS

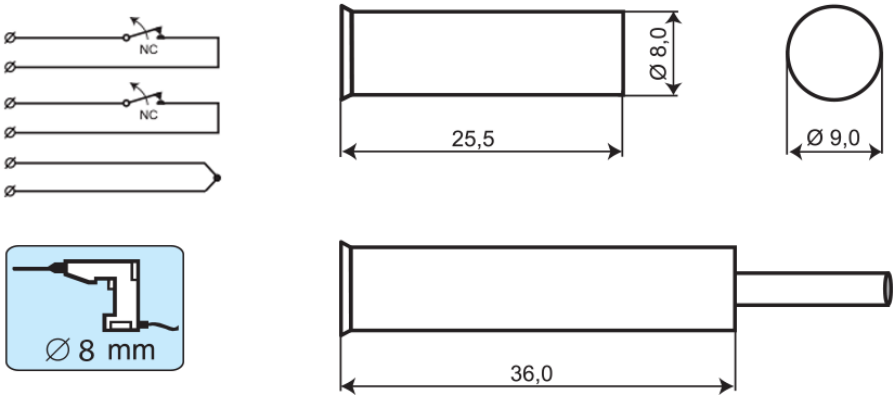

Alarmtech Sweden AB
Staffansväg 8B | 192 78 Sollentuna | Sweden
alarmtechglobal.com